

CARE2 EVC

Compliant to BS5839-9:2021




CARE 2

Click for more, including links to 'How to' Videos & Guides and related products.

FEATURES:

- CARE2 is an all-in-one Emergency Voice Communication (EVC) system.
- Fully monitored and battery-backed (24 hours quiescent and three hours functional).
- Outstations are wired in a radial (star) configuration using two core (fire resisting enhanced/non-enhanced) cable.
- Fully networkable. Networked panels are wired in a loop configuration using 2 x two core (fire resisting enhanced) cable.
- In the event of a break in the network loop, the system will continue to function.
- All outstations are powered from the line, including the roaming telephone enclosure and emergency assistance/toilet alarms.
- Optional link to fire detection system prevents hoax disabled refuge calls (C2CFPE required). Firefighter, roaming telephones and toilet alarms remain active.
- Speech steered; disabled refuge outstations.
- Full duplex speech; firefighter and emergency/steward telephones.
- Any combination of the following outstations can be installed on a single system:
 - Disabled refuge (Type B outstations).
 - Fire telephones (Type A outstations).
 - Steward (emergency) telephones (Type A outstations).
 - Roaming telephones.
 - Emergency assistance/toilet alarms.

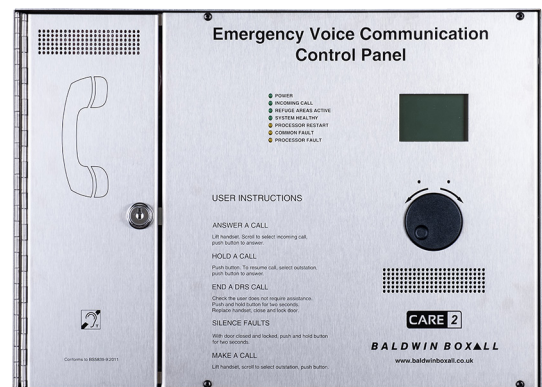

BENEFITS:

- Stylish, versatile and simple to navigate and control.
- Suitable for small or large systems - fully networkable.
- Monitored roaming telephone handsets - enables use with confidence.
- System configuration via SD card, front panel or PC connection.
- Facilitates clear communication during an emergency event.
- Ideal for retro-fitting old star-wired systems.
- Quality built, robust system.
- Activity/fault log.
- Outstations, including toilet alarms, powered directly from the line - no local power needed.
- Any combination of outstation on one system.

CARE2 System Control




CONTROL / SLAVE PANEL:

- Unique design and easy to operate using the rotary encoder and clear LCD screen.
- The rugged red handset (with hearing aid compatible earpiece) is mounted in a lockable compartment.
- System configuration is stored on an SD card and can be modified either with a PC (via Ethernet or directly onto the SD card) or without (via the encoder and display).
- Includes a fault relay for indication at the fire panel.
- The system can be connected to a local fire panel using a C2CFPE interface module.
- Two of these panels can be installed on a networked system (fit C2CN cards). One panel will act as a 'slave' unit. The 'slave' unit can be activated as the 'master' if required (typically during an emergency).

EXPANSION CARDS & MODULES:


4-way line card (C2CEK4):

- Each module enables the addition of four outstations.
- Add these modules to the control panel(s) and/or NEPs as required.
- Up to three modules can be added per panel/NEP.



Network card (C2CN) - includes fire panel interface & Ethernet connection ability:

- Add one to each control panel for including on a networked system.



Fire panel interface card (C2CFPE) - includes Ethernet connection ability:

- Optional module which fits in the control panel (not required if a C2CN has been fitted).
- Use to keep disabled refuge outstations in 'standby' mode until activated by the fire panel.
- Add for connection to remote lamp/buzzer (BVOCCA).



NETWORK EXPANSION PANEL (NEP):

- Facilitates expansion of the CARE2 system.
- Fit up to 15 NEPs on a network (or fourteen if installing two 'control' panels), enabling systems of 256 outstations. (If you have a requirement for a larger system, please contact our sales department to discuss).
- The NEP is supplied as a 4-way unit as standard. Simply increase to 8, 12 or 16-way by fitting C2CEK4 line cards. (Each NEP is fitted with a C2CN card).
- For initial system set-up and local testing (prior to connection to the network) a 'roaming telephone' can be temporarily connected to an internal socket.
- The status of local outstations can be viewed by using the rotary encoder and LCD screen.

REMOTE LAMP BUZZER:

- Provides a visible and audible signal of a call on the CARE2 system.
- Ideal solution for systems where the control panel is mounted in an unmanned area.
- Uses the output on the master panel with adjustable delay.
- Stainless steel finish.



DISABLED REFUGE OVERRIDE SWITCH:

- As an option, the disabled refuge outstations on a CARE2 system can be kept in 'standby mode' until required in an emergency. (Connection to the fire panel via a C2CFPE card is required).
- A system in standby mode will need to be activated occasionally, such as for routine testing. An override switch (BVCRBG) can be used for this purpose.

CARE2 Outstation Options

DISABLED REFUGE (Type B) OUTSTATION:

- Provides two-way communication between building management and person(s) occupying a 'Refuge Area' during an emergency evacuation - typically a fire.
- User simply presses the button to initiate call (occupy area). Further communication is hands free at the refuge point or by the end user at the control panel.
- Type B outstation.
- Calls are reset at the control panel when the refuge area occupant has been evacuated to safety.
- The unit has an output to feed an external induction loop amplifier.
- Disabled refuge outstations on the system are permanently 'active'. As an option (by fitting a C2CFPE or C2CN to the control panel) they can be set to 'standby' mode until activated by the fire panel.




IP65 RATED ENCLOSURE:

- Enables mounting of disabled refuge outstation in external areas such as car parks, balconies etc.
- Green, surface mount enclosure.
- Takes one C2RRG outstation.



PLASTERBOARD BACK BOX:

- Enables 'first fix' in plasterboard for the disabled refuge outstation.
- Green or stainless steel options (bezel colour).



STEWARD / EMERGENCY TELEPHONE:

- Designed for sports venues and stadia, the steward telephone has the same facilities as the fire telephone.



FIRE TELEPHONE (Type A) OUTSTATION:

- Telephone handset in a metal enclosure. Used by fire officers/building control during an emergency, such as a fire.
- Assists with the efficient evacuation of a building.
- Robust red handset with hearing aid compatible earpiece (T-coil).
- Type A outstation.
- Robust handset in heavy duty enclosure.
- Provides clear, full duplex, two-way communication with the control panel.
- Push door or slot lock versions available.
- Conference facility for fire and roaming telephones via control panel (recommended maximum of five including the control panel).
- Calls are initiated by simply opening the door.



ROAMING TELEPHONE:


- Robust red handset with hearing aid compatible earpiece.
- Any number of jack sockets can be daisy chained (up to 500m. EOL resistor required in end unit). (One handset operational per line at any one time).
- The enclosure features a lockable glass door and stores up to six handsets (order separately).
- Handsets in the enclosure are monitored at all times (green reassurance LEDs).
- Jack sockets are flush mounting (backbox required).



Emergency Assistance/Toilet Alarm for CARE2

EMERGENCY ASSISTANCE/TOILET ALARM:

- The 3-part toilet alarm is connected directly to the CARE2 control panel (or NEP)..
- Powered from the line (does not require local power).
- Fully compliant to BS8300:2009.
- Up to two toilet alarm kits can be connected to one line (will show as one point on the panel).
- Each DTAKIT comprises:
 - Ceiling mounted pull switch (with two 'G' pulls).
 - Reset button with LED and (optional) sounder.
 - Over-door triangular lens with integral sounder.
 - 'Euan's Guide' sign
 - WC self-adhesive sign.
- Caller reassurance facility (the sounder pulses faster when the call is accepted at the panel).

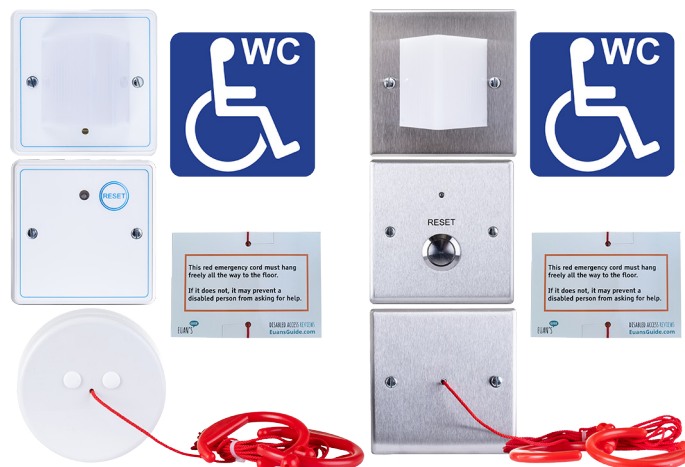

IP65 RATED TOILET ALARM:

- Compatible with the DTAKIT items.
- Surface mounting, moisture resistant units.
- Suitable for installation in wet rooms, shower rooms, etc.
- Products available include:
 - Pull cord.
 - Call button.
 - Reset button.
 - Call & reset button.



Ideal for installation in showers & wet rooms.



ASSISTANCE CALL & TOILET ALARM ADDITIONS*:

- Other products available which are compatible with the DTAKIT are:
 - Wall mounting call button.
 - Call button & reset point.
 - Wall mounting pull cord.
 - Call button with 6.35 mm jack socket.
- All the above are available with a white or stainless steel finish.
- Enables the addition of any number of unmonitored call and/or reset points to a single over-door light. (NB only one over-door light can be included per call zone. A working system must comprise of 1 x over-door light + 1 x call point + 1 x reset point as a minimum.)



Building Your CARE2 System

NB: CARE2 is not set up as a system by default at the factory and will require some assembly and configuration on site.

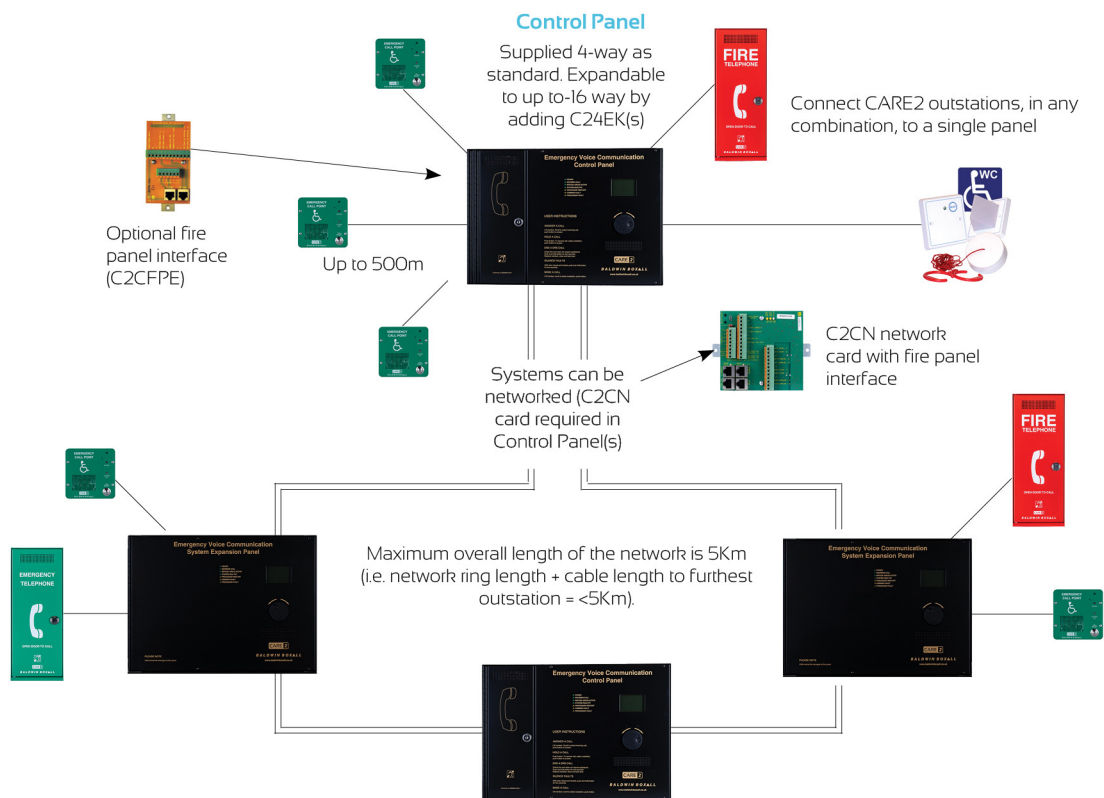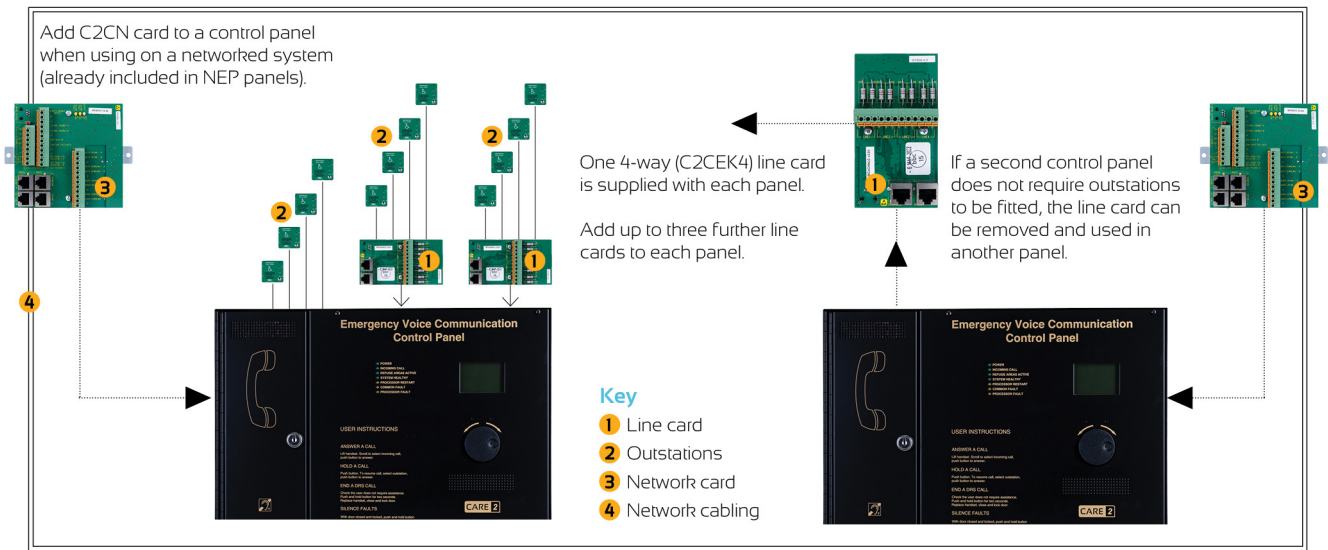

Up to 16 panels can be placed on the network (2 of these can be control panels, one of which will act as a slave unless activated as the master during an emergency).

CARE2 System Information

GENERAL INFORMATION:

- There are three main components - control panel, network expansion panels (NEP) and the outstations.
- Outstations are wired in a radial (star-wired) configuration. Control/NEP panels are loop wired.
- Two control panels can be installed on a networked system (the second one will serve as a 'slave' unit unless activated as the 'master' during an emergency).
- Any combination of outstations can be connected to a control/NEP panel.
- Any number of jack sockets (for the roaming telephone) can be daisy chained (up to 500m; EOL resistor required in end unit). One handset will be operational per line at any one time.
- Outstations and control/NEP panels can be surface mounted or flush mounted with optional bezel. Back boxes are required for the roaming telephone jack sockets, toilet alarm reset and overdoor light.
- The control console is typically wall mounted in a central control room.
- Outstations are wall mounted in locations such as refuge areas, stairwells, fallback positions, corridors and other 'gathering' points, at a height easily reached by users.
- All outstations are powered from the line, including the emergency assistance/toilet alarms and roaming telephone handset enclosure.
- System configuration is stored on an SD card and can be modified either with a PC (via Ethernet or directly onto the SD card) or without (via the encoder and display).
- Up to two emergency assistance/toilet alarms (Baldwin Boxall DTAKITs) can be connected to one line. (Or one toilet alarm with two ceiling pulls).

CABLING:


- Network loop - 2 x two core fire resisting cable (enhanced recommended).
- Up to 500m cable run between each outstation and the control/NEP panel.
- Up to 500m cable run between each control/NEP panel.
- Maximum overall length of the network is 5Km (i.e. network ring length + cable length to the furthest outstation = <5Km).

Download Cabling Information




RECOMMENDED MOUNTING HEIGHTS:

Control panel:

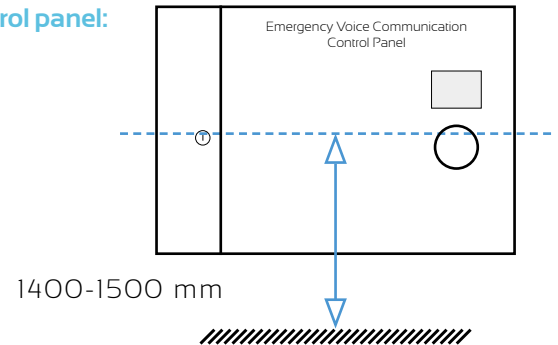


Fire & emergency telephones:

Type A

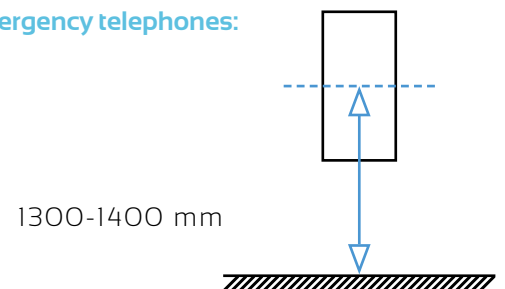


Disabled refuge outstations:

Type B

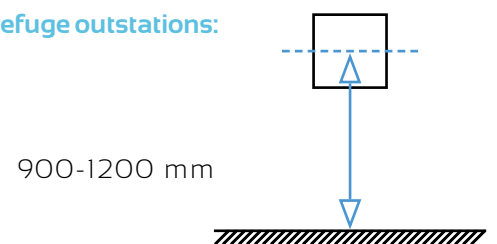

Toilet alarm pull:

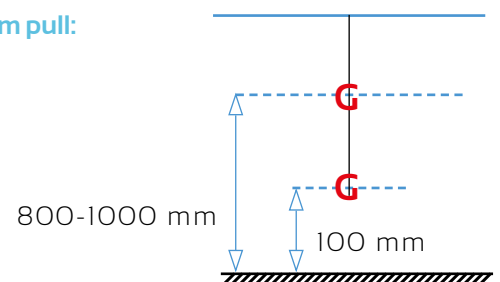

CARE2 Product Codes

SYSTEM CONTROL

	Black	Stainless Steel
4-way control panel	C2CB4	C2CS4
4-way NEP	C2CBNEP	C2CSNEP
4-way line card	C2CEK4	
Flush mount bezel	C2CBZ	C2CSZ
Fire panel interface	C2CFPE	
Network expansion card	C2CN	
Spare key	KEYBVE	
Remote lamp buzzer	BVOCCA	
Disabled refuge override	BVCRBG	

DISABLED REFUGE

	Green	Stainless Steel
Refuge outstation	C2RRG	C2RRS
Flush mount bezel	BVCRMGRN	BVCRMSS
Plasterboard back box	C2RRGPB	C2RRSPB
IP65 rated enclosure	C2RRBIP	

FIRE TELEPHONE

	Red	Stainless Steel
Push door	C2FTRP	C2FTSP
Slot lock door	C2FTRL	C2FTSL
Flush mount bezel	C2FTRZ	C2FTSZ

STEWARD TELEPHONE

	Green
Push door	C2ETGP
Slot lock door	C2ETGL
Flush mount bezel	C2ETGZ

ROAMING TELEPHONE

	Black	Stainless Steel
Lockable enclosure	C2RTEB	C2RTES
Flush mount bezel	C2CBZ	C2CSZ
Spare key	KEYBVE	
Telephone handset	C2RTH	
Jack socket - UK	C2RTJUK	
Jack socket - American	C2RTJA	

TOILET ALARM

	White	Stainless Steel
3 part kit	DTAKIT	DTASKIT
Ceiling pull	DTACP	DTASKIT
Over-door light	DTAODL	DTASODL
Reset point	DTARP	DTASRP

ASSISTANCE CALL

Call button	DTACB	DTASCB
Call button + reset button	DTACBRP	DTASCBRP
Wall mount pull cord	DTACPW	DTASCPW
Call button + 6.35mm jack	DTACBJ	DTASCBJ

IP65 RATED TOILET ALARM

	Grey
Pull cord	DTACPM
Call button	DTACBM
Reset button	DTARPM
Call button + reset button	DTACBRPM

Maintenance Service Contracts Available:



Complimentary Maintenance Log Books Available:

EVC System Maintenance Log Book



LEADING THE WAY TO SAFETY

CARE2 System Specification

	Control panel (6 network expansion panel)	Disabled refuge	Firefighter telephone	Emergency / Steward telephone	Roaming telephone jack socket	Roaming telephone enclosure	Emergency Assistance / toilet alarm
Product codes	C2CB4 / C2CS4 C2CBNEP/C2CSNEP	C2RRG C2RRS	C2FTRP/L C2FTSP/L	C2ETGP C2ETGL	C2RTJUK C2RTJA	C2RTEB C2RTES	DTAKIT DTASKIT
Power supply	200-230V AC 50-60Hz	20-30V DC self powered from line					
Power consumption	75VA max						
Humidity range	95% non-condensing						
Temperature range	-10°C to +40°C						
Indicators include	4 x green LEDs: Power, call, RR active, healthy. 3 x yellow LEDs: Processor restart, common fault, processor fault.	1 x red LED: 'status' 1 x green LED: 'system ok'	1 x red LED: status indicator	1 x green LED: status indicator	-	1 x green LED: status indicator	Triangular lens on over-door light/sounder. 1 x red LED on reset.
Dimensions mm W x H x D	430 x 310 x 130	134 x 134 x 44	130 x 330 x 75	130 x 330 x 75	UK: 85 x 85 A: 4 1/2" x 2 3/4"	430 x 310 x 130	Max: 85 x 85
Bezel dimensions mm W x H	470 x 350	154 x 154	170 x 370	170 x 370	-	-	-
Bezel cut out mm	440 x 320	136 x 136	136 x 336	136 x 336	-	-	-
Back box requirements mm W x H x D	-	-	-	-	UK (mm): 85 x 85 x 35 A: 4" x 2 1/8" x 2 1/8"	-	Single gang (n/a white ceiling pull)
Weight	C2CB4/NEP - 9 kg C2CS4/NEP - 8.6 kg	1 kg	2.5 kg	2.5 kg	0.5	6.5 kg	DTAKIT 0.34 kg DTASKIT 0.48 kg
Finish	RAL 9005 / SS grade 304	RAL 6024 / SS grade 304	RAL 3020 / SS grade 304	RAL 6024	SS grade 304	RAL 9005 / SS grade 304	White plastic / SS grade 304
Knockouts/cable entry points:							
Top of unit	23 x 20 mm	4 x 20 mm	1 x 20 mm	1 x 20 mm	-	23 x 20 mm	
Bottom of unit	-	4 x 25 mm	-	-	-	-	-
Mounting height	1.4 - 1.5 m	0.9 m - 1.2 m	1.3 - 1.4 m	1.3 - 1.4 m	-	-	Various

Please note: Stainless steel products are not intended for use in humid areas.



BALDWIN BOXALL
LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom

T: +44 (0) 1892 664422
E: hello@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk

WE RESERVE THE RIGHT TO CHANGE THE TECHNICAL SPECIFICATION WITHOUT PRIOR NOTICE. DOC NO: 1.00431223