

I - DESCRIPTION

L' **AZ 1222** est un module générateur de signaux d'alerte (voir ci-dessous tableau des 7 différents signaux).

I - DESCRIPTION

The **AZ 1222** generates alarm signals (see below for the 7 different signals).

II-CARACTERISTIQUES TECHNIQUES

- **Fréquence sirène** : suivant type de sirène (voir tableau ci-dessous)
- **Commande** : par contact en 2 et 4 de la prise DIN ① ou sur le bornier à vis ② (Fig. I)
 - Contact fermant, mettre S11-S12 sur ON
 - Contact ouvrant, mettre S11-S12 sur OFF
- Résistance de ligne de commande :
 - Contact ouvert de 4,7 K à
 - Contact fermé de 0 à 470
- **Consommation**12 mA
- **Dimensions** (LxPxH) 35 x 205 x 74 mm
- **Poids**100 g

II - TECHNICAL SPECIFICATIONS

- **Siren frequency**: depending on the type of siren (see board below)
- **Command** : by contact in position 2 and 4 on the DIN plug ① or on the terminal strip ② (Fig. I)
 - Closing contact, put ON S11 and S12
 - Opening contact, put OFF S11 and S12
- Line resistance :
 - Open contact from 4.7 K to
 - Closed contact from 0 to 470
- **Consumption**12 mA
- **Dimensions** (LxWxH) : 35 x 205 x74mm
- **Weight**100 g

III - UTILISATION

La programmation de la tonalité des différents signaux est réalisée à l'aide des commutateurs : S1 à S10 (Fig. I) qu'il faut basculer sur ON ou OFF d'après le tableau ci-dessous.

- **Remarque** : les potentiomètres P1 à P5 sont tous pré réglés en usine.

III - USE


The tone programming of the different signals is made with S1 to S10 switches (Fig. I) (on ON or OFF following the board below).

- **Note** : P1 to P5 potentiometers are all supplied settled.

Possibilité de 7 signaux différents :

7 different alarms available :

Type de signal Type of signal	Fréquences (Hz)	Cycle (mn)	Rapport Ratio	Mode	SW 1					SW 2				SW 3	
					S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	
Evacuation/ Emergency *	554 440	120	1/4	alterné alternated	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF	
1 ton/1 tune	900	continu/continuous			OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	
Pompier/Fire NFS 32001	554 440	30	1/3	alterné alternated	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	
Barrage/Dam	1000 400	30	1/4	hululé ululated	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	
Hululé/Ululated	1300 750	40	1/4	hululé ululated	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	
Bip-Bip	580	120	1/4	discont.	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	
Bip-Bip	670	120	1/4	discont.	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF	

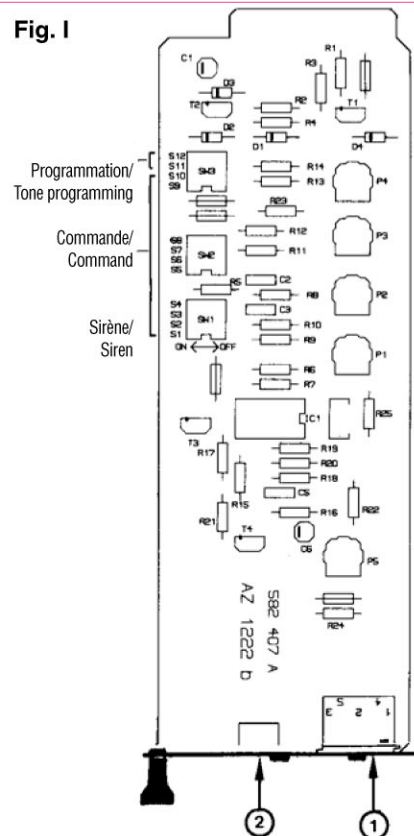

- ① Prise DIN / DIN plug
- ② Bornier / Terminal strip

Commande en 2 et 4 prise DIN Command on position 2 & 4 DIN	SW 3	
	S11	S12
Contact fermant/Closing contact	ON	ON
Contact ouvrant/Opening contact	OFF	OFF

* Conforme à la norme NFS 32001
Comply with NFS 32001 norme