

CLOCKAUDIO

C800E/C800 C801E/C801 MINI SHOTGUN PROFESSIONAL MICROPHONE

Developed for speech purposes in a wide range of pro and live sound applications including places of worship, conference and leisure centres, banks and financial trading centres.



- Slim mini shotgun
- Optimised for speech clarity
- Superior grade components
- Unobtrusive slimline design
- Engineered in high quality brass
- Finished in satin black
- C801E/C801 fitted with a knuckle joint giving both lateral and vertical movement



PROFESSIONAL
MICROPHONE
SYSTEMS

C800E/C800 C801E/C801 MINI SHOTGUN PROFESSIONAL MICROPHONE

CLOCKAUDIO

SPECIFICATIONS

TYPE	Condenser (back electret)	
POLAR PATTERN	Hypercardioid	
FREQUENCY RESPONSE	50 Hz - 18 KHz	
SENSITIVITY	- 47 dB +/- 3 dB at 1 KHz (0 dB = 1 V/Pa)	
IMPEDANCE	"E" Type Open Ended	200 Ohms 1.8 K Ohms
S/N RATIO	64 dB(A)	
MAXIMUM SPL	125 dB 1% THD	
POWER REQUIREMENTS	"E" Type Open Ended	9 - 48 volts phantom power 1.5 - 9 volts max. through series resistor optimum voltage 6.0V
SWITCHABLE BASS FILTER	"E" Type	- 4 dB per octave at 400 Hz to - 6 dB per octave at 100 Hz
SWITCHABLE PAD	"E" Type	-10 dB
CABLE	Open Ended	2 metres
TERMINATION	"E" Type Open Ended	PPA Adaptor - Male XLR M10 x 1 Thread with shakeproof washer and nut
DIMENSIONS	C800E C800 C801 C801E	12mm dia. 458mm overall length with W8 windshield - 480mm 12mm dia. 375mm overall length with W8 windshield - 397mm 12mm dia. 150mm overall length with W8 windshield - 172mm 12mm dia. 262mm overall length with W8 windshield - 285mm
FINISH	Satin Black. Other finishes to special order	
ACCESSORIES	W8 foam windshield included	

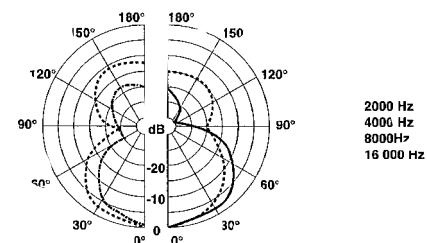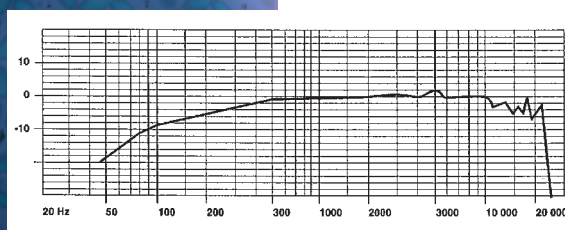

CLOCKAUDIO

9 Stratfield Park, Elettra Avenue, Waterlooville, Hampshire PO7 7XN
Tel +44 (0)23 9225 1193 Fax +44 (0)23 9225 1201
E-mail sales@clockaudio.demon.co.uk www.clockaudio.demon.co.uk



PROFESSIONAL
MICROPHONE
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.