

MOULDED SOUND PROJECTORS



• CAD20/T






• CAD20/TC

Technical Specifications

Rated power, Watts	20
Tappings 100 volt line, Watts	20/10/5/2.5
Transformer Impedance, Ohms, 100V	500/1k/2k/4k
Tappings 70.7 volt line, Watts	10/5/2.5/1.25
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	110-18,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	92
S.P.L. @ Full power, Octave Bandwidth, dB	105
Acoustic Power (dB-PWL@1 watt) 1k/2kHz,dB	89 / 90
Dispersion at 1k/2k Hz, Degrees	180 / 120
Directivity Axial Q factor, 1k/2kHz	2.60 / 5.60
Dimensions, front & depth, mm	Ø138 x 204
Net weight, Kgs	1.90
Colour/Finish	White
Material	ABS Plastic with UV inhibitor and Stainless steel hardware
Mounting	Aluminium U bracket

'C' Version can be supplied as BS5839 Part 8 voice alarm compliant, on request

CAD20/T CAD20/TC

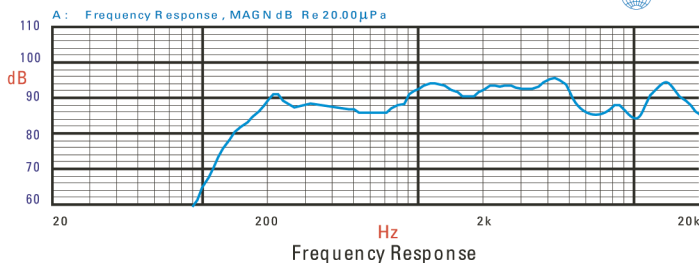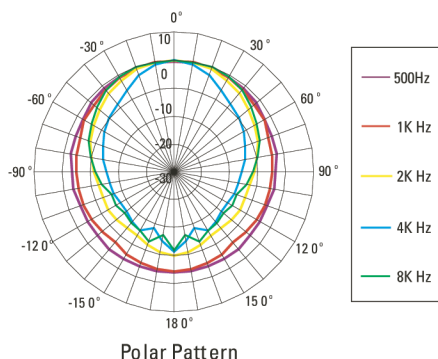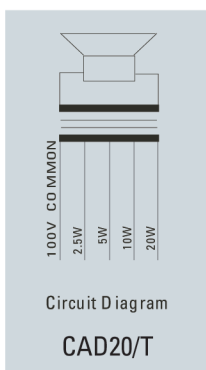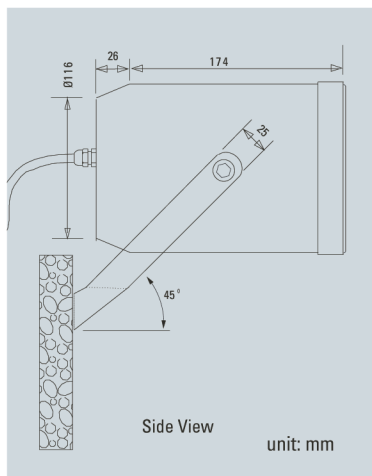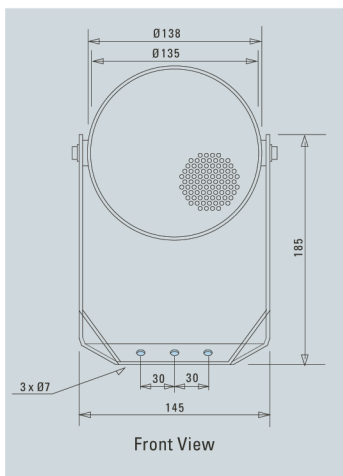

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org