

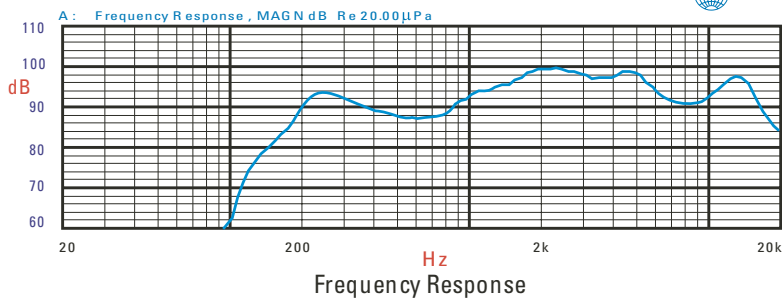
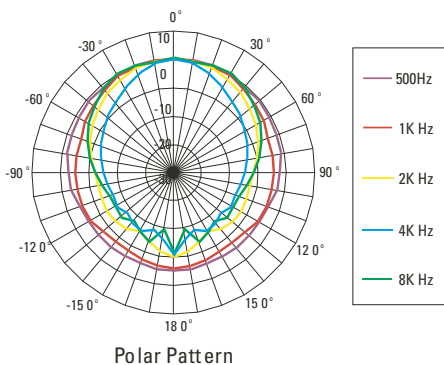
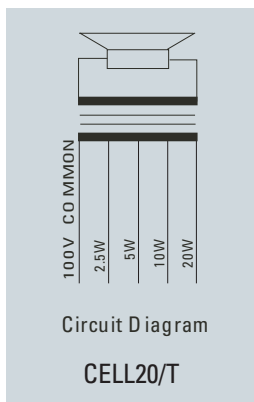


METAL SOUND PROJECTORS

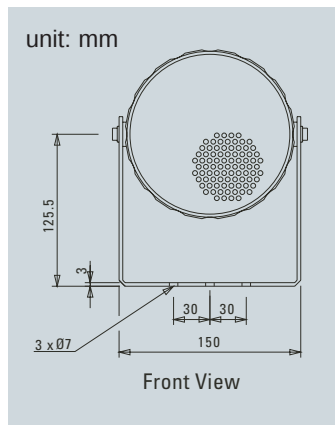

CELL20/T	CELL20/TC	Technical Specifications
Rated power, Watts		20
Tappings 100 volt line, Watts		20/10/5/2.5
Transformer Impedance, Ohms, 100V		500/1k/2k/4k
Tappings 70.7 volt line, Watts		10/5/2.5/1.25
Driver impedance, Ohms		8
Effective frequency range, Hz (BS6840)		110-16,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz – 10 kHz		88
S.P.L. @ Full power, Octave Bandwidth, dB		101
Acoustic Power (dB-PWL@1 Watt) 1k/2k Hz, dB		87 / 84
Dispersion at 1k/2k Hz, Degrees		180 / 120
Directivity Axial Q factor, 1k/2kHz		2.6/5.9
Dimensions, front & depth, mm		Ø140 x 191
Net weight, Kgs		2.40
Colour/Finish		White RAL9016
Material		Aluminium with Stainless steel hardware
Mounting		Aluminium U bracket
'C' Version can be supplied as BS5839 Part 8 Voice Alarm compliant, on request		

CELL20/T CELL20/TC

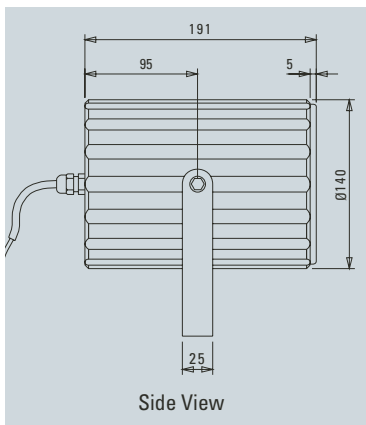

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org