

WEATHERPROOF METAL HORN LOUDSPEAKER








• MHS20/TC

Technical Specifications

Rated power, Watts	20
Tappings 100 volt line, Watts	20/10/5/2.5
Transformer Impedance, Ohms, 100V	500/1k/2k/4k
Tappings 70.7 volt line, Watts	10/5/2.5/1.25
Driver impedance, Ohms	20 or 8
Effective frequency range, Hz (BS6840)	300 – 16,500
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	102
S.P.L. @ Full power Octave Bandwidth, dB	114
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	100 / 98
Dispersion at 1k/2k Hz, Degrees	110 / 80
Directivity Axial Q factor, 1k/2kHz	4.70 / 12.50
Dimensions, front & depth, mm	Ø220x297
Net weight, Kgs	2.60
Colour/Finish	Grey RAL7035
Material	Die cast aluminium housing
Mounting	Lockable stainless steel U bracket
BS5839 Part 8 voice alarm compliant	

MHS20/TC

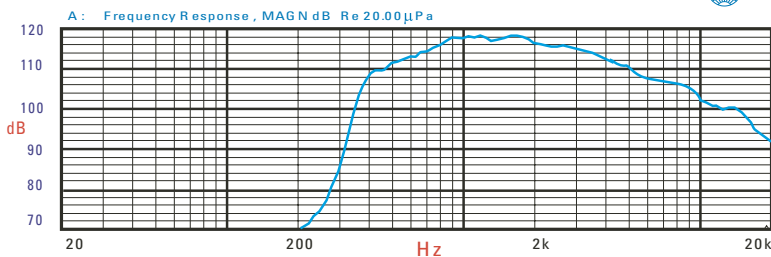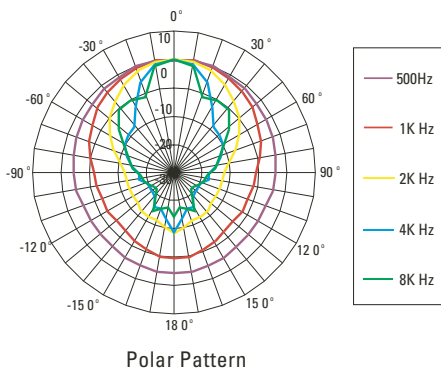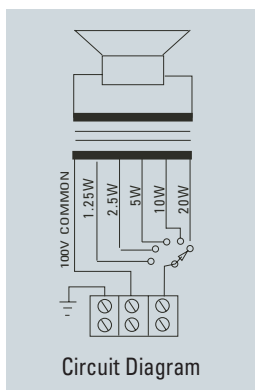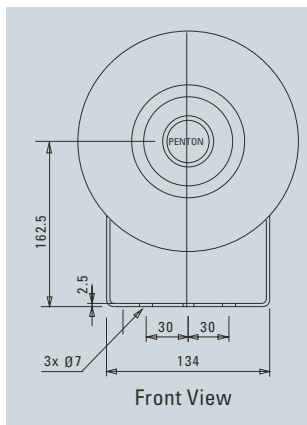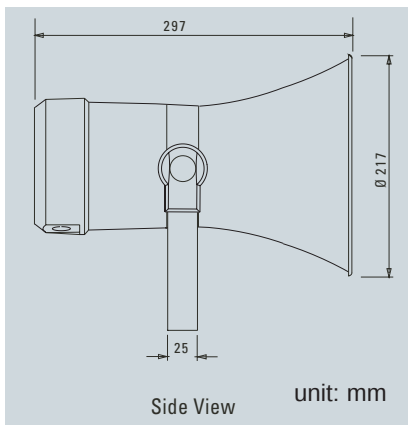

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org