

MUSIC HORN LOUDSPEAKERS








• MSH30/T • MSH30/TC

Technical Specifications

Rated power, Watts	30
Tappings 100 volt line, Watts	30/15/7.5/3.75
Transformer Impedance, Ohms, 100V	333/667/1.33k/2.66k
Tappings 70.7 volt line, Watts	15/7.5/3.75/1.875
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	70 – 16,500
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	99
S.P.L. @ Full power Octave Bandwidth, dB	114
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	91 / 94
Dispersion at 1k/2kHz, Degrees	100 / 120 (horizontal), 60 / 120 (vertical)
Directivity Q factor, 1k/2kHz	8.50 / 6.50
Dimensions, front & depth, mm	442 x 260 x 287.5
Net weight, Kgs	5.5
Colour/Finish	Grey RAL7035
Material	ABS Plastic with UV inhibitors
Mounting	Aluminium U bracket

'C' Version can be supplied as BS5839 Part 8 voice alarm compliant, on request

MSH30/T MSH30/TC

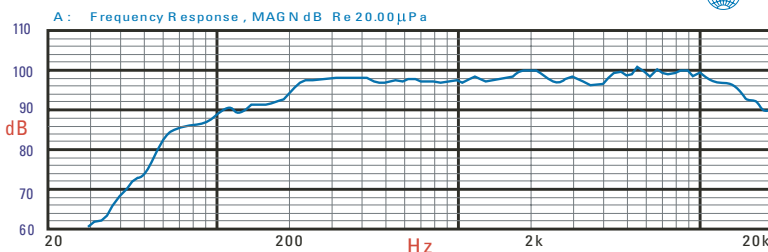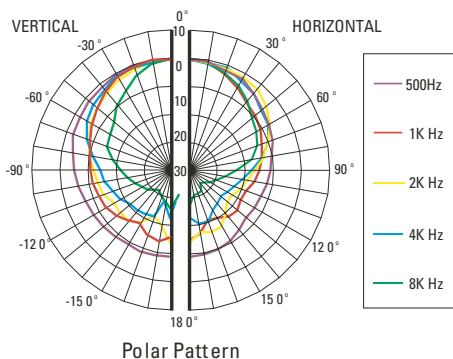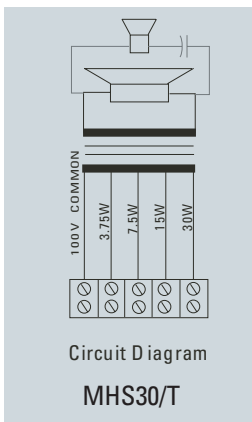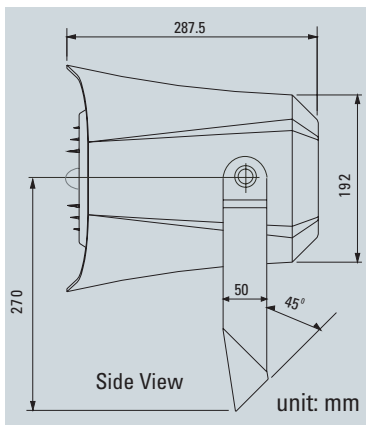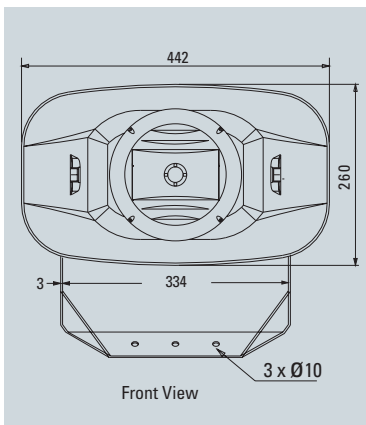

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315

Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org