

HIGH PERFORMANCE METAL COLUMN LOUDSPEAKER







• MUS20/TC

Technical Specifications


Rated power, Watts	20
Tappings 100 volt line, Watts	20 / 10 / 5 / 2.5
Transformer Impedance, Ohms, 100V	500/1k/2k/4k/8k
Tappings 70.7 volt line, Watts	10 / 5 / 2.5 / 1.25
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	100–10,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	93
S.P.L. @ Full power Octave Bandwidth, dB	107
Acoustic Power (dB-PWL@1watt) 1 k/2kHz, dB	90 / 88
Dispersion at 1k/2kHz, Degrees	170 / 120 (horizontal) 80 / 40 (vertical)
Directivity Axial Q factor, 1k/2kHz	5.20 / 10.10
Dimensions, front & depth, mm	350 x 142 x 164
Net weight, Kgs	4.70, Bracket: 0.56
Colour/Finish	White RAL9016
Material	Aluminium
Mounting	Die cast metal swivel Bracket

BS5839 Part 8 voice alarm compliant

MUS20/TC

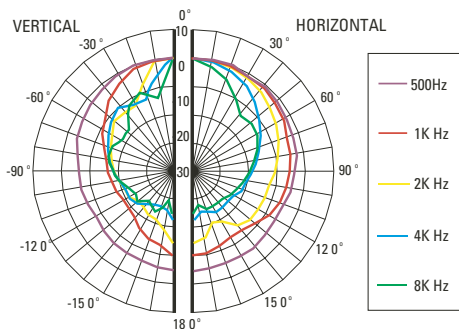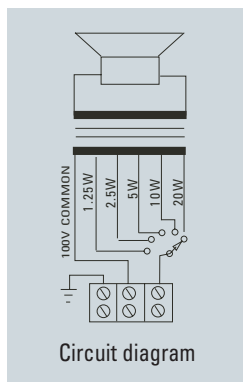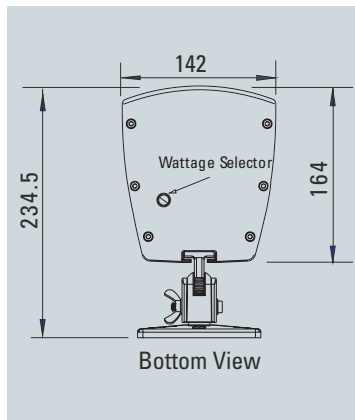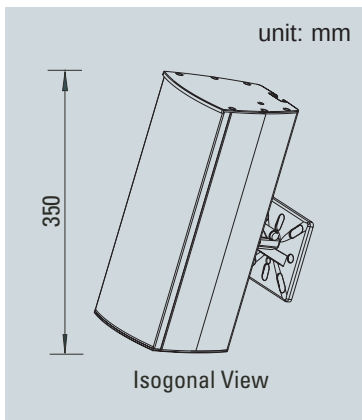

Polar Pattern

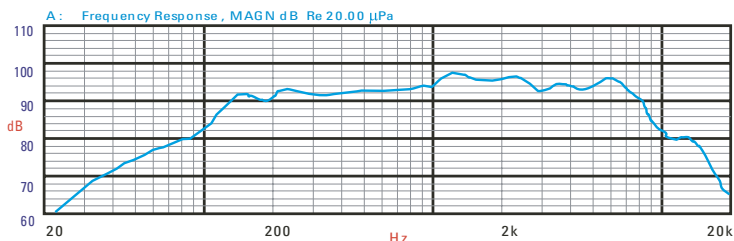

Frequency Response



Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org