

HIGH PERFORMANCE METAL COLUMN LOUDSPEAKER








• MUS40/TC

Technical Specifications

Rated power, Watts	40
Tappings 100 volt line, Watts	40 / 20 / 10 / 5
Transformer Impedance, Ohms, 100V	250/500/1k/2k/4k
Tappings 70.7 volt line, Watts	20 / 10 / 5 / 2.5
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	100-10,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	95
S.P.L. @ Full power Octave Bandwidth, dB	112
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	93 / 92
Dispersion at 1k/2kHz, Degrees	180 / 140 (horizontal) 70 / 40 (vertical)
Directivity Axial Q factor, 1 k/2kHz	5.20 / 8.50
Dimensions, front & depth, mm	670 x 142 x 164
Net weight, Kgs	8.20, Bracket: 0.56
Colour/Finish	White RAL9016
Material	Aluminium
Mounting	Die cast metal swivel Bracket

BS5839 Part 8 voice alarm compliant

MUS40/TC

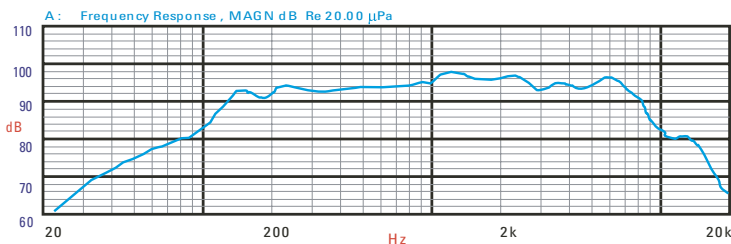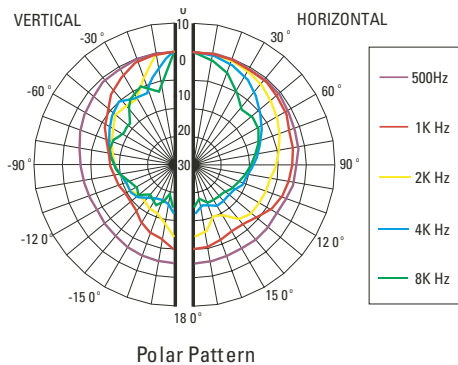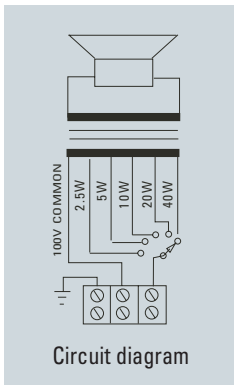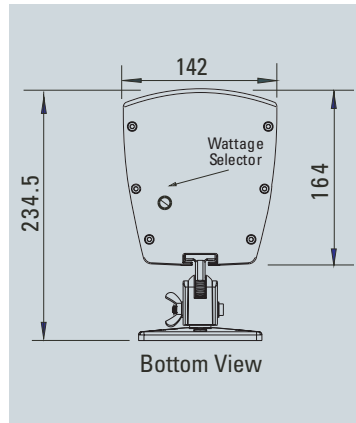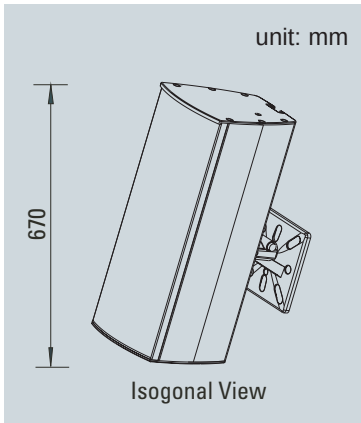

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org

