

MOULDED CABINET LOUDSPEAKERS








• PBC10/TCOAX • PBC10/TCOAXC

Technical Specifications

Rated power, Watts	10
Tappings 100 volt line, Watts	10 / 5 / 2.5 / 1.25
Transformer Impedance, Ohms, 100V	1.67k/3.33k/6.66k/13.3k/39.9k
Tappings 70.7 volt line, Watts	5 / 2.5 / 1.25 / 0.625
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	80 – 20,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10kHz	89
S.P.L. @ Full power Octave Bandwidth, dB	99
Acoustic Power (dB-PWL@1 watt) 1k/2kHz, dB	88 / 84
Dispersion at 1k/2k Hz, Degrees	160/120
Directivity Axial Q factor, 1k/2kHz	3.7/5.9
Dimensions, front & depth, mm	330 x 240 x 90
Net weight, Kgs	1.30
Colour/Finish	White
Material	ABS Moulding with UV inhibitors, Steel mesh
Mounting	Keyhole and/or screws

'C' Version can be supplied as BS5839 Part 8 Voice Alarm compliant, on request

PBC10/TCOAX PBC10/TCOAXC

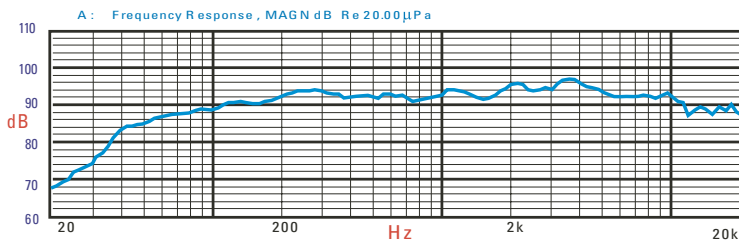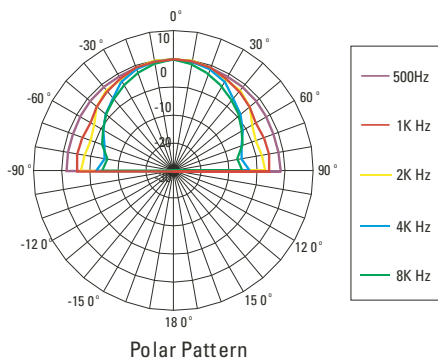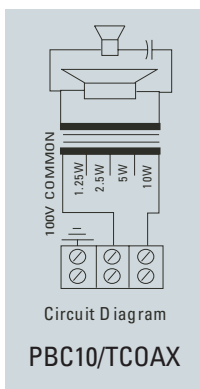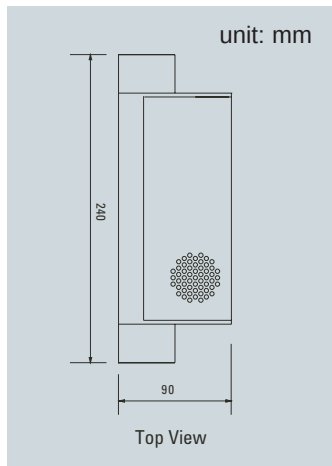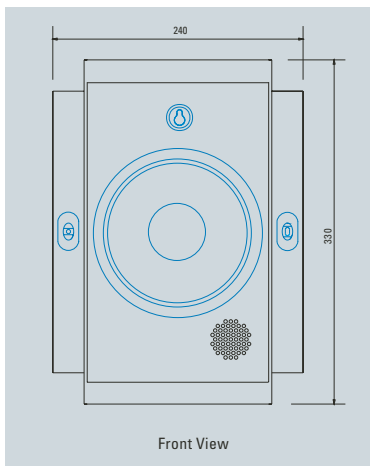

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org