

MOULDED CABINET LOUDSPEAKERS








• PBC6/T • PBC6/TC

Technical Specifications

Rated power, Watts	6
Tappings 100 volt line, Watts	6 / 3 / 1.5 / 0.75 / 0.25
Transformer Impedance, Ohms, 100V	1.67k/3.33k/6.66k/13.3k/39.9k
Tappings 70.7 volt line, Watts	3 / 1.5 / 0.75 / 0.25 / 0.125
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	160 – 18,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	96
S.P.L. @ Full power Octave Bandwidth, dB	104
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	94 / 95
Dispersion at 1k/2k Hz, Degrees	160/ 120
Directivity Axial Q factor, 1 k/2kHz	3.6/5.8
Dimensions, front & depth, mm	330 x 240 x 90
Net weight, Kgs	1.15
Colour/Finish	White
Material	ABS moulding with UV inhibitors Steel mesh
Mounting	Keyhole and/or screws

'C' Version can be supplied as BS5839 Part 8 voice alarm compliant, on request

PBC6/T PBC6/TC

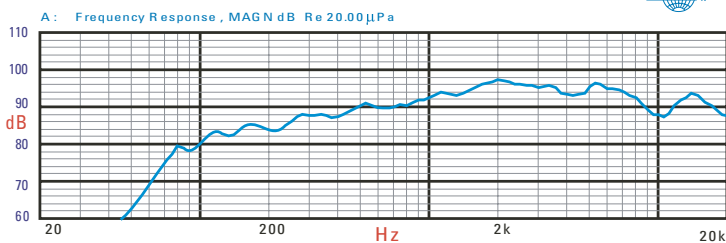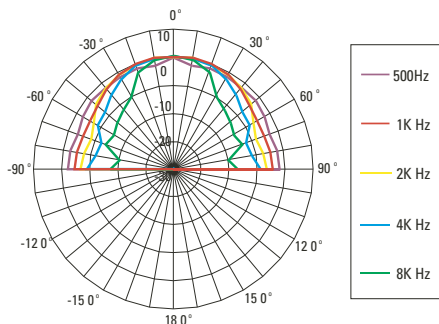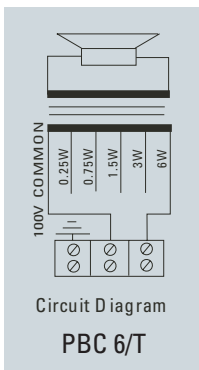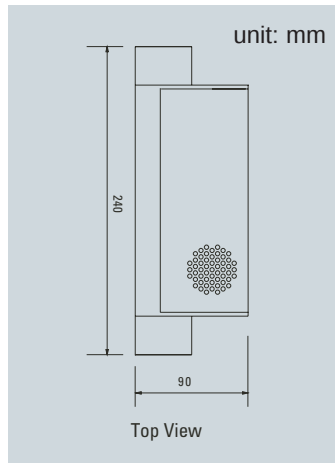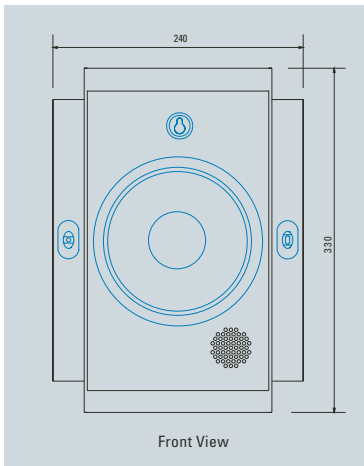

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org