

WEATHERPROOF HORN LOUDSPEAKERS








• PH20/T • PH20/TC

Technical Specifications

Rated power, Watts	20
Tappings 100 volt line, Watts	20/10/5/2.5
Transformer Impedance, Ohms, 100V	500/1k/2k/4k
Tappings 70.7 volt line, Watts	10/5/2.5/1.25
Driver impedance, Ohms	20 or 8
Effective frequency range, Hz (BS6840)	250-8,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	101
S.P.L. @ Full power, Octave Bandwidth, dB	114
Acoustic Power (dB-PWL@1 watt) 1 kHz, dB	98 / 98
Dispersion at 1k/2kHz, Degrees	130 / 70
Directivity Axial Q factor, 1 k/2kHz	4.90 / 13.60
Dimensions, front & depth, mm	Ø203 x 254
Net weight, Kgs	1.90
Colour/Finish	Grey RAL7035
Material	ABS plastic housing with UV inhibitors
Mounting	Stainless Steel U Bracket
IP Rating	66

'C' Version can be supplied as BS5839 Part 8 Voice Alarm compliant, on request

PH20/T PH20/TC

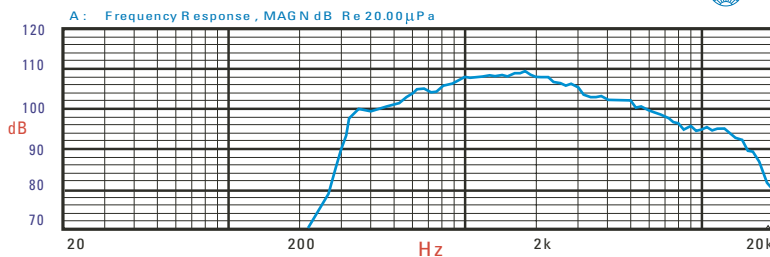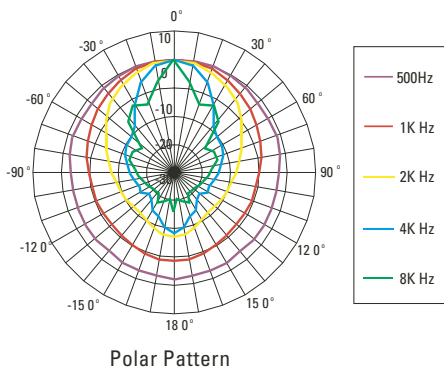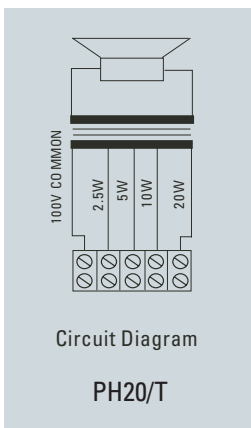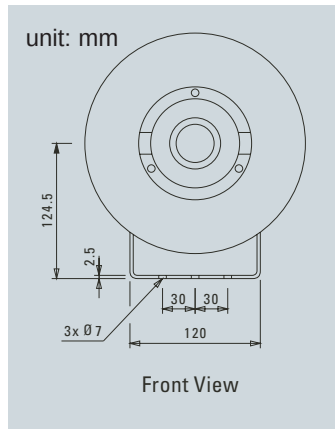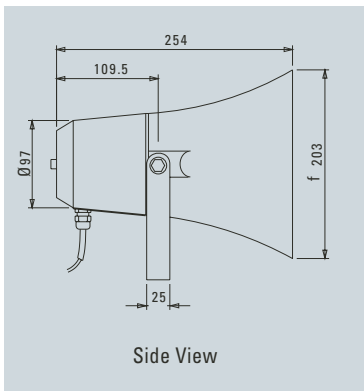

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk Website: www.penton.org

