

WEATHERPROOF HORN LOUDSPEAKERS








• PH30/T • PH30/TC

Technical Specifications

Rated power, Watts	30
Tappings 100 volt line, Watts	30/15/7.5/3.75
Transformer Impedance, Ohms, 100V	330/660/1.32k/2.64k
Tappings 70.7 volt line, Watts	15/7.5/3.75/1.875
Driver impedance, Ohms	20 or 8
Effective frequency range, Hz (BS6840)	330-8,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	104
S.P.L. @ Full power Octave Bandwidth, dB	118
Acoustic Power (dB-PWL@1 watt) 1 kHz, dB	101 / 100
Dispersion at 1k/2kHz, Degrees	110 / 80
Directivity Axial Q factor, 1 k/2kHz	6.20 / 15.1
Dimensions, front & depth, mm	Ø238 x 287
Net weight, Kgs	2.30
Colour/Finish	Grey RAL7035
Material	ABS plastic housing with UV inhibitors
Mounting	Stainless Steel U Bracket
IP Rating	66

'C' Version can be supplied as BS5839 Part 8 Voice Alarm compliant, on request

PH30/T PH30/TC

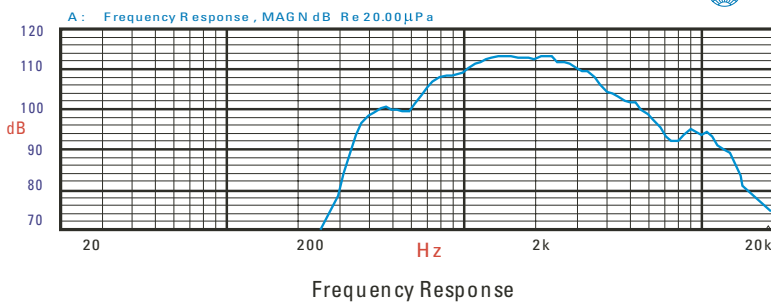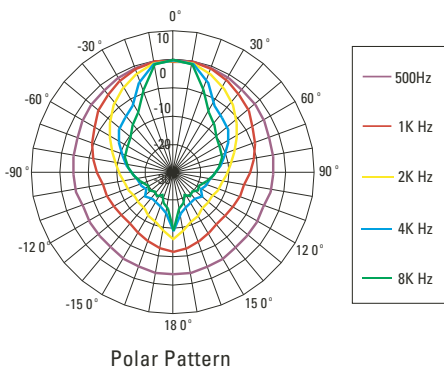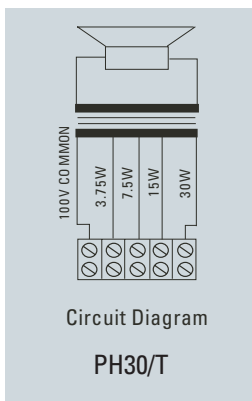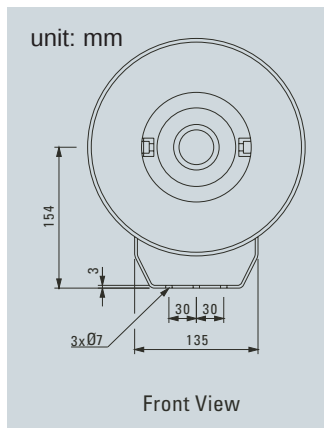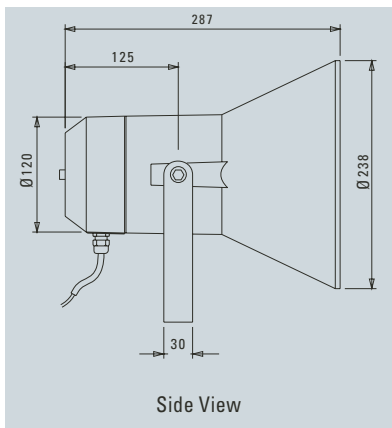

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org