







MOULDED CABINET LOUDSPEAKER



• **PMC 4/T** • **PMC 4/TC** Technical Specifications

Rated power, Watts	4
Tappings 100 volt line, Watts	4/2/1/0.5
Transformer Impedance, Ohms, 100V	2.5k/5k/10k/20k
Tappings 70.7 volt line, Watts	1.25/2.5/5/10k
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	220-12,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	85
S.P.L. @ Full power Octave Bandwidth, dB	90
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	88-88
Dispersion at 1k/2kHz, Degrees	180/120
Directivity Axial Q factor, 1 k/2kHz	3.7/4.8
Dimensions, front & depth, mm	119 x 119 x 62.5
Net weight, Kgs	0.69
Colour/Finish	White RAL9016
Material	ABS Plastic with UV inhibitors
Mounting	4 x Screws

PMC 4/T PMC 4/TC

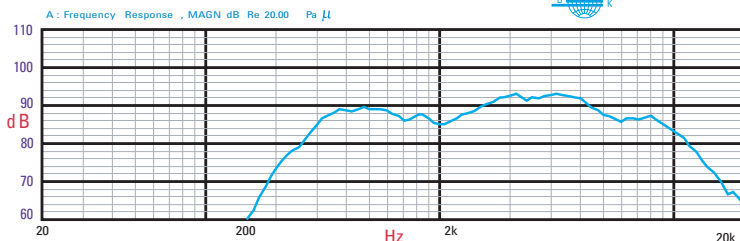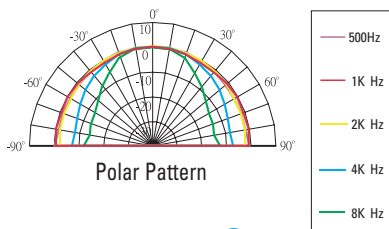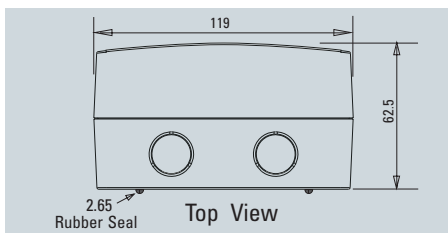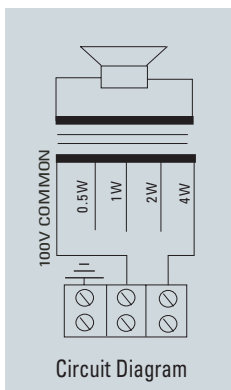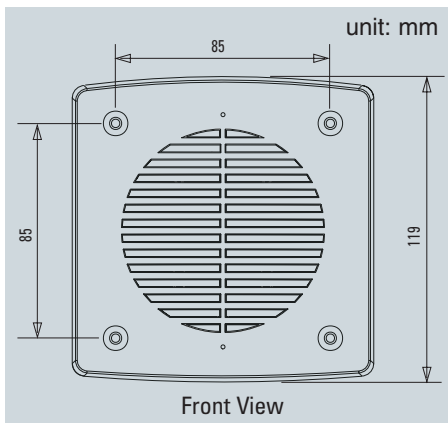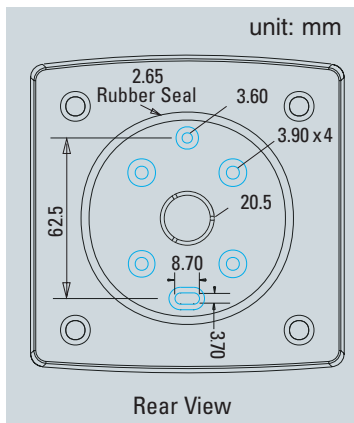

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315

Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org