

MOULDED CABINET LOUDSPEAKER








• PWC 6/T

• PWC 6/TC

Technical Specifications

Rated power, Watts	6
Tappings 100 volt line, Watts	6/3/1.5/0.75/0.25
Transformer Impedance, Ohms, 100V	1.67k/3.33k/6.66k/13.3k/39.9k
Tappings 70.7 volt line, Watts	3/1.5/0.75/0.375/0.125
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	220-18,500
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	91
S.P.L. @ Full power Octave Bandwidth, dB	99
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	90-92
Dispersion at 1k/2kHz, Degrees	180/120
Directivity Axial Q factor, 1 k/2kHz	3.7/4.8
Dimensions, front & depth, mm	233 x 171 x 75
Net weight, Kgs	1.04
Colour/Finish	White RAL9016
Material	ABS Plastic with UV inhibitors
Mounting	2 x Screws

PWC 6/T PWC 6/TC

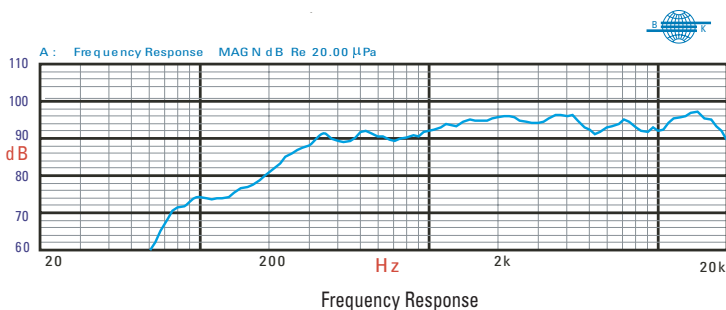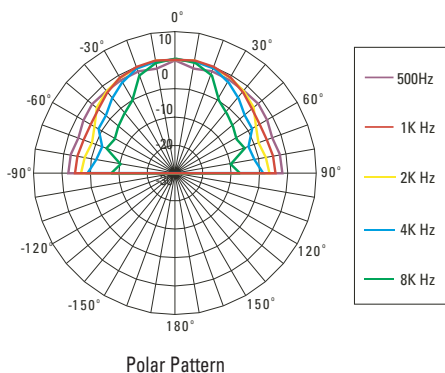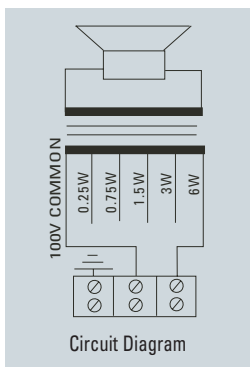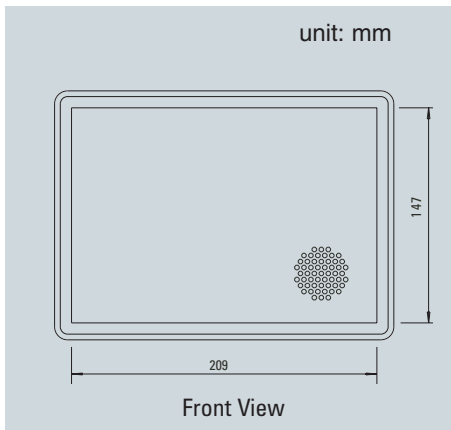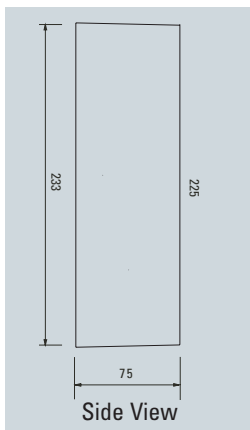

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org