

RCS3/T METAL CEILING LOUDSPEAKER, MINIATURE








• RCS3/T

Technical Specifications

Rated power, Watts	6
Tappings 100 volt line, Watts	6 / 3 / 1.5 / 0.75 / 0.25
Transformer Impedance, Ohms, 100V	1.67k/3.33k/6.66k/13.3k/39.9k
Tappings 70.7 volt line, Watts	3 / 1.5 / 0.75 / 0.375 / 0.125
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	100~20,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	87
S.P.L. @ Full power Octave Bandwidth, dB	94
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	83/85
Dispersion at 1k/2k Hz, Degrees	180/180
Directivity Axial Q factor, 1k/2kHz	2.0/2.4
Dimensions, diameter, mm	Ø 104.5
Net weight, Kgs	0.49
Colour/Finish	White RAL9016
Material	Steel
Mounting	Twin Spring
Cut-out, mm	Ø 78


RCS3/T

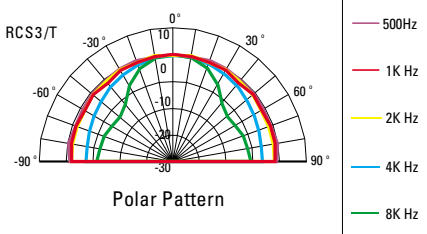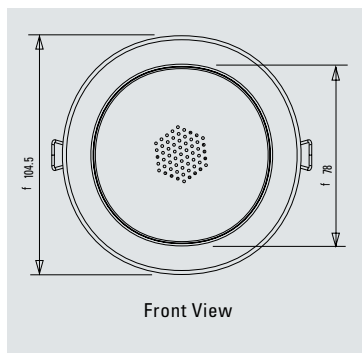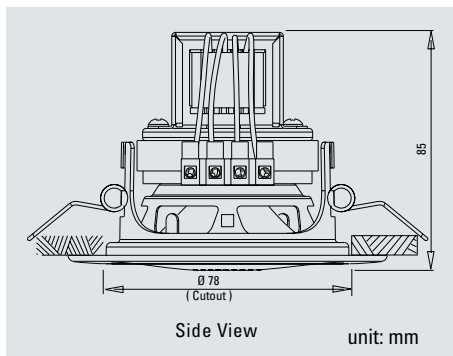

CE



A : Frequency Response, MAGN dB Re 20.00 Pa μ

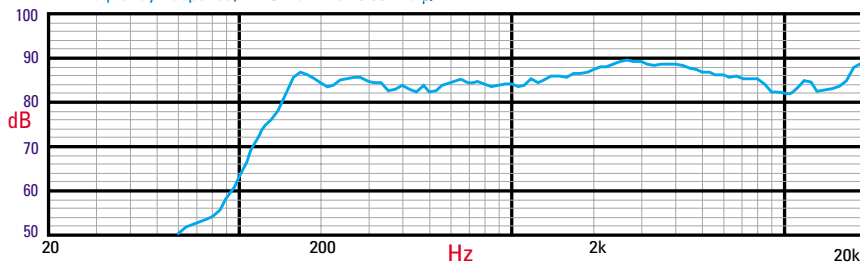

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315

Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org