

VANDALPROOF METAL CABINET LOUDSPEAKER







• SENTRY4/STC


Technical Specifications

Rated power, Watts	4
Tappings 100 volt line, Watts	4/2/1/0.5
Transformer Impedance, Ohms, 100V	2.5k/5k/10k/20k
Tappings 70.7 volt line, Watts	2/1/0.5/0.25
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	170–20,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	87
S.P.L. @ Full power Octave Bandwidth, dB	94
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	85 / 86
Dispersion at 1k/2k Hz, Degrees	110/120
Directivity Axial Q factor, 1 k/2kHz	3.2/3.8
Dimensions, front & depth, mm	130 x 130 x 88
Net weight, Kgs	1.2
Colour/Finish	White RAL9016
Material	Steel
Mounting	Screw
BS5839 Part 8 voice alarm compliant	

SENTRY4/STC

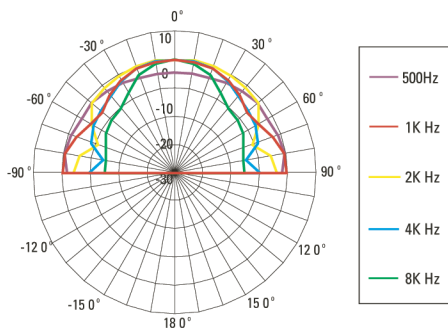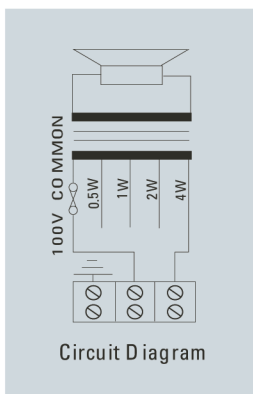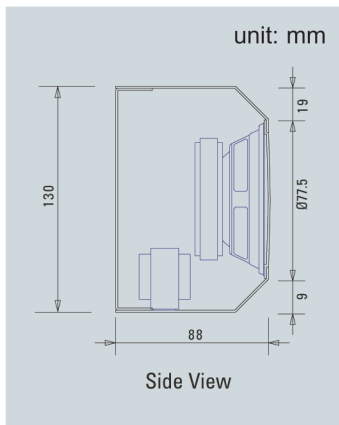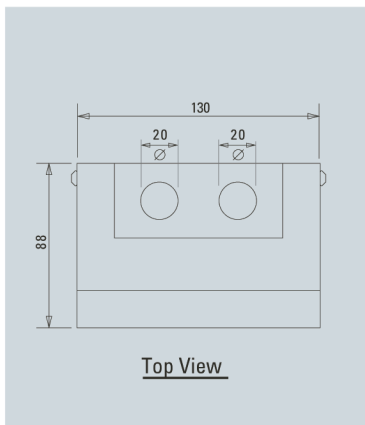

CE

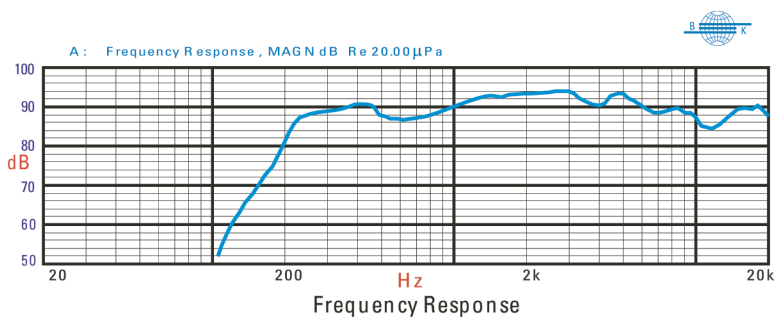

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315

Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org