

VANDALPROOF BI-DIRECTIONAL METAL CABINET LOUDSPEAKER








• SENTRY6/BDTC

Technical Specifications

Rated power, Watts	6
Tappings 100 volt line, Watts	6/3/1.5/0.75/0.25
Transformer Impedance, Ohms, 100V	1.67k/3.33k/6.66k/13.3k/40k
Tappings 70.7 volt line, Watts	3/1.5/0.75/0.375/0.125
Driver impedance, Ohms	4 (single driver:8)
Effective frequency range, Hz (BS6840)	125 – 12,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10kHz	88
S.P.L. @ Full power Octave Bandwidth, dB	96
Acoustic Power (dB-PWL@1 watt) 1k/2kHz, dB	90 / 89
Dispersion at 1k/2k Hz, Degrees	110/120
Directivity Axial Q factor, 1k/2kHz	0.6/0.7
Dimensions, front & depth, mm	210 x 130 x 98
Net weight, Kgs	2
Colour/Finish	White RAL9016
Material	Steel
Mounting	Screw

BS5839 Part 8 voice alarm compliant

SENTRY6/BDTC

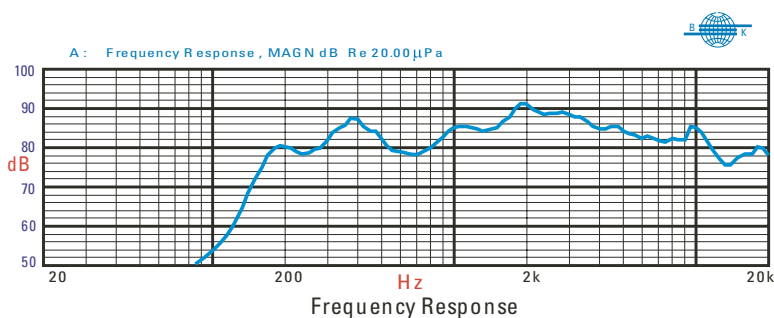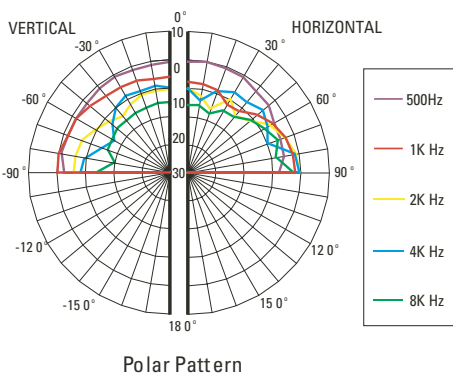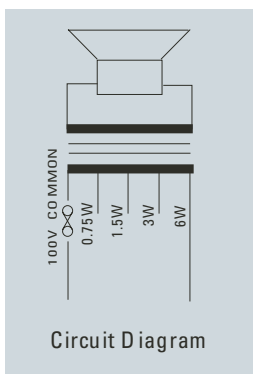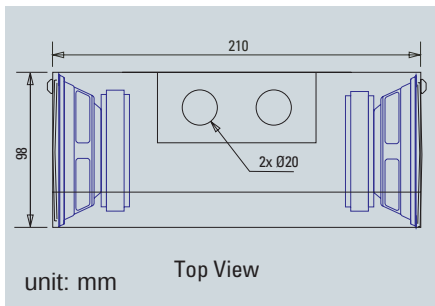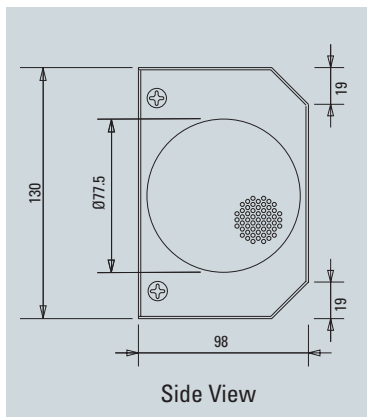

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315 Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org