

VANDALPROOF METAL CABINET LOUDSPEAKERS









• SENTRY6/STC • SENTRY6/TBBC

Technical Specifications

Rated power, Watts	6
Tappings 100 volt line, Watts	6/3/1.5/0.75/0.25
Transformer Impedance, Ohms, 100V	1.67k/3.33k/6.66k/13.3k/40k
Tappings 70.7 volt line, Watts	3/1.5/0.75/0.375/0.125
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	200 – 18,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	87
S.P.L. @ Full power Octave Bandwidth, dB	94
Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB	84 / 84
Dispersion at 1k/2k Hz, Degrees	140/110
Directivity Axial Q factor, 1 k/2kHz	4.2/6.7
Dimensions, front & depth, mm	190 x 190 x 75
Net weight, Kgs	1.8
Colour/Finish	White RAL9016
Material	Steel Front, Die cast back box
Mounting	Screw
Flush Mounted Version Available	SENTRY6/TBBC
BS5839 Part 8 voice alarm compliant	

EASE, CATT, ULYSSES and Architectural specifications are supplied on the disc inserted at the back of this folder
 Manufacturer reserves the right to alter specifications without notice – September 2003

SENTRY6/STC SENTRY6/TBBC

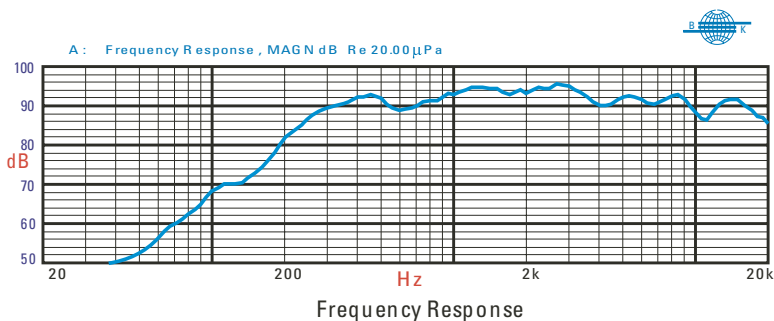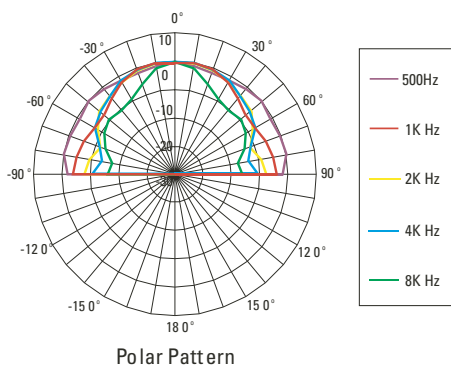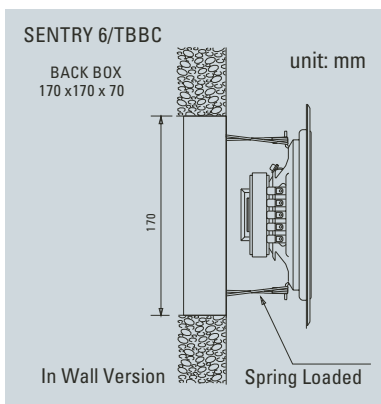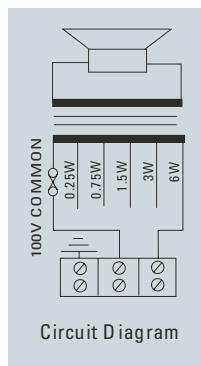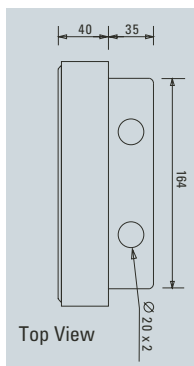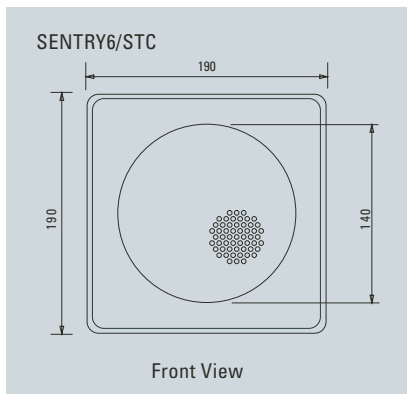

Penton UK Ltd

Unit 2, Teville Industrials, Dominion Way, Worthing, West Sussex BN14 8NW England

Tel: +44 (0)1903 215315

Fax: +44 (0)1903 215415

E-Mail: sales@pentonuk.co.uk

Website: www.penton.org