



JD 20

JD 20/T

This durable 20 Watt Music Cabinet Loudspeaker incorporates a 2-way enclosure, a custom loaded 5" polypropylene coned low frequency drive unit and a neodymium high frequency tweeter matched with a passive crossover.

Designed for use in shops, clubs, themed environments, wine bars etc., this unit provides high quality sound reproduction from a compact and attractive injection moulded enclosure.

Available in black or white, 100 Volt line or 16 ohm versions, this unit is supplied complete with a universal mounting bracket which has a unique locking facility allowing mounting on the wall or ceiling with ease.

The JD20/T, 100 Volt Line version, has a variable tapping selection switch accessible from the front of the cabinet and can be adapted to comply with British and European Standards for voice alarm systems.

MUSIC CABINET LOUDSPEAKERS

Penton UK Ltd

Unit 2,
Teville Industrials,
Dominion Way,
Worthing,
West Sussex
BN14 8NW
England



Telephone:
+44 (0)1903 215315
Fax:
+44 (0)1903 215415
E-Mail:
sales@pentonuk.co.uk
Website:
www.penton.org

Technical Specifications

Rated power, Watts	20
Transformer tapings 100 and 70.7 volt line, Watts	20/ 10/ 5/ 2.5/ 1.25
100 volt line Transformer Impedance , Ohms	1.67k/ 3.33k/ 6.66k/ 13.3k/ 39.9k
70.7 volt line Transformer Impedance, Ohms	833/ 1.67k/ 3.33k/ 6.66k/ 13.3k8
Driver impedance, Ohms	8 (JD20 : 16 Ohm)
Effective frequency range, Hz (BS6840)	63 - 20,000
S.P.L. ,@ 1m, 1watt,1k hz, dB	84
S.P.L. ,@Full power/ 1m, dB	97
Dispersion at 1,000 Hz, Degrees	160
Directivity Q factor, 1k Hz	3.50
Dimensions (WxHxD), mm (Inch)	146 x 229 x 150 ((5.74 x 9.02 x 5.91)
Net weight, Kgs (Lbs)	1.50 (3.0)
Colour / Finish	White or Black
Material	ABS Moulded housing
Mounting	Die-casted Alum. Swivel Bracket

CE

Low Impedance available with JD20, 16 ohm

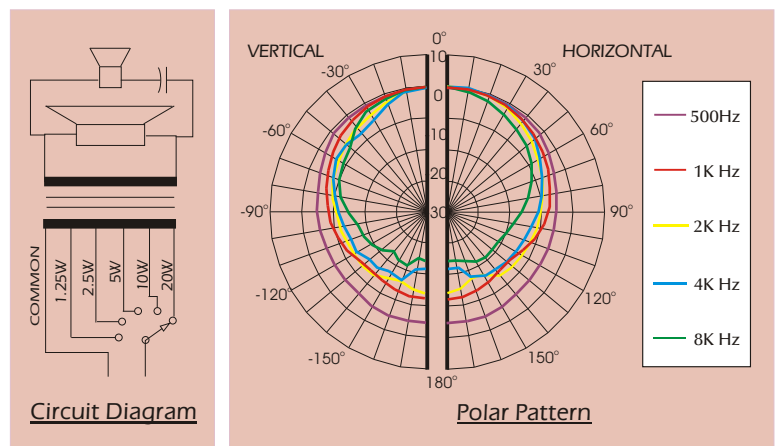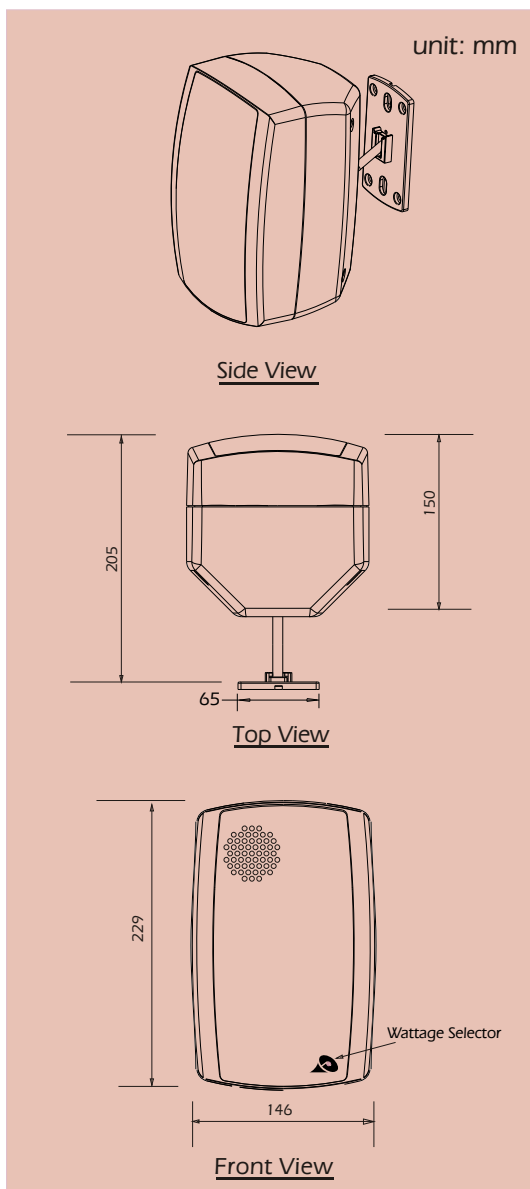

EASE and CATT data are available on request

