



Technical Specifications

Rated power, Watts	20
Transformer tapings 100volt line, Watts	20 /10 /5 /2.5
Transformer Impedance , Ohms	500 / 1k / 2k / 4k
70.7volt line,Watts	10 /5 /2.5 /1.25
Driver impedance, Ohms	20 or 8
Effective frequency range, Hz (BS6840)	300 - 16,500
S.P.L. ,@ 1m, 1watt, dB	105
S.P.L. ,@Full power/ 1m, dB	116
Dispersion at 1,000 Hz, Degrees	110
Directivity Q factor, 1k Hz	4.7
Dimensions front and depth, mm	φ220 x 297
Net weight, Kgs	2.60
Colour / Finish	Cold gray, RAL 7035
Material	Die-Casted Aluminium housing with Stainless Steel U bracket & hardware

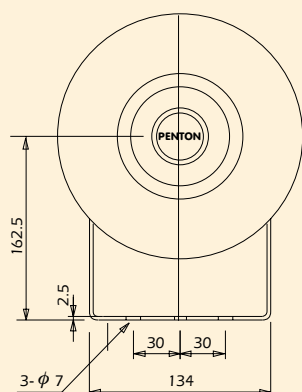


Front View

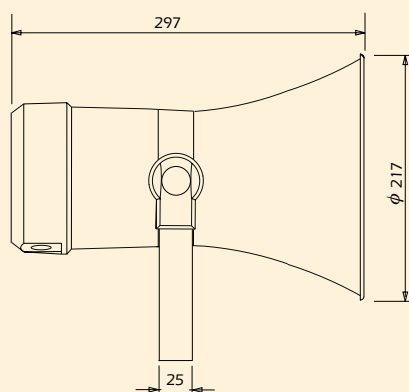


Side View

unit: mm

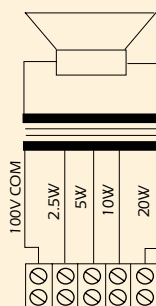

Circuit Diagram

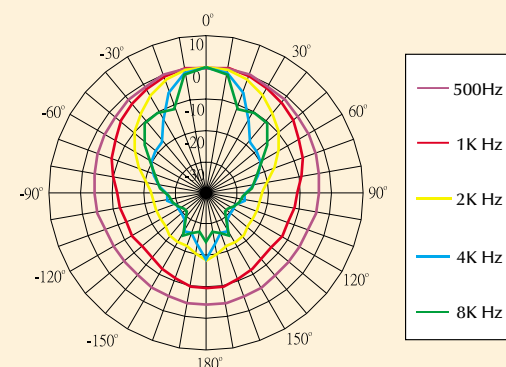

Polar Pattern

EASE and CATT data are available on request

