


Technical Specifications


Rated power, Watts	6
Transformer tapings 100 and 70.7 volt line, Watts	6/ 3/ 1.5/ 0.75/ 0.25
100 volt line Transformer Impedance , Ohms	1.67k/ 3.33k/ 6.66k/ 13.3k/ 39.9k
70.7 volt line Transformer Impedance, Ohms	833/ 1.67k/ 3.33k/ 6.66k/ 13.3k
Driver impedance, Ohms	8
Effective frequency range, Hz	110 - 20,000
S.P.L. ,@ 1m, 1watt,1k hz, dB	93
S.P.L. ,@Full power/ 1m, dB	100
Dispersion at 1,000 Hz, Degrees	130
Directivity Q factor, 1k Hz	3.26
Dimensions front and depth, mm (inch)	330 x 240 x 88 (13 x 9.45 x 3.47)
Net weight, Kgs (lbs)	1.15 (2.48)
Colour / Finish	White
Material	ABS Moulded housing, steel mesh
Mounting	Key hole and/or Screws



unit: mm

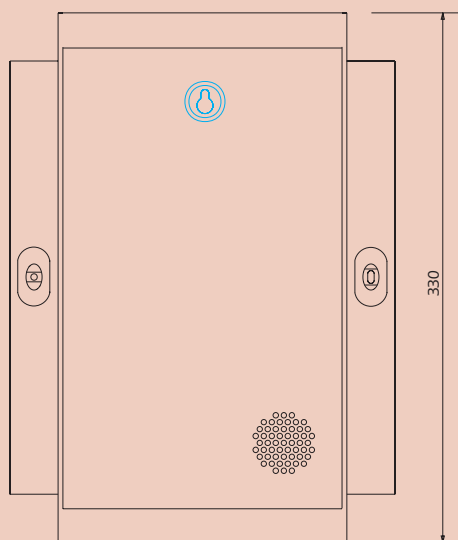

Front View

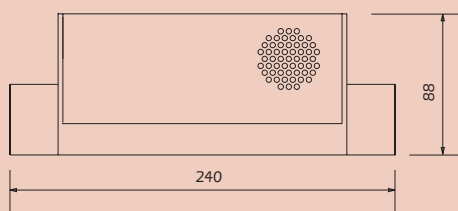

Top View

