




RCS 4/T METAL CEILING LOUDSPEAKER, MINIATURE



Steel firedome version, **model RCS 4/FTS**

Technical Specifications

Rated power, Watts	4
Transformer tapings 100 and 70.7 volt line, Watts	4/ 2/ 1/ 0.5/ 0.25
100 volt line Transformer Impedance , Ohms	2.5k/ 5k/ 10k/ 20k/ 40k
70.7 volt line Transformer Impedance, Ohms	1.25k/ 2.5k/ 5k/ 10k/ 20k
Driver impedance, Ohms	8
Effective frequency range, Hz (BS6840)	220 - 16,500
S.P.L. ,@ 1m, 1watt,1k hz, dB	86
S.P.L. ,@Full power/ 1m, dB	91
Dispersion at 1,000 Hz, Degrees	140
Directivity Q factor, 1k Hz	RCS 4/T:1.90, RCS 4/FTS : 1.70
Dimensions front and depth, mm (inch)	RCS 4/T : $\phi 132 \times 93$ ($\phi 5.20 \times 3.66$) RCS 4/FTS: $\phi 132 \times 98$ ($\phi 5.20 \times 3.86$)
Net weight, Kgs (lbs)	RCS 4/T: 0.72 (1.55) ,RCS 4/FTS: 0.92 (1.98)
Colour / Finish	White
Material	Steel
Mounting	Fixing Springs x 4 (Stainless Steel)

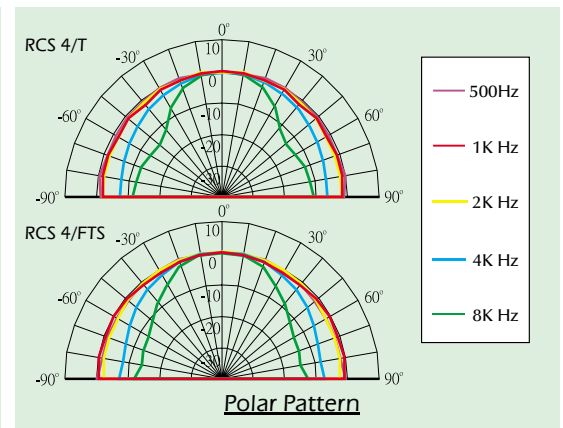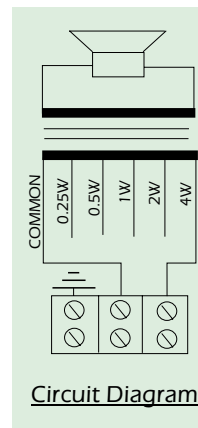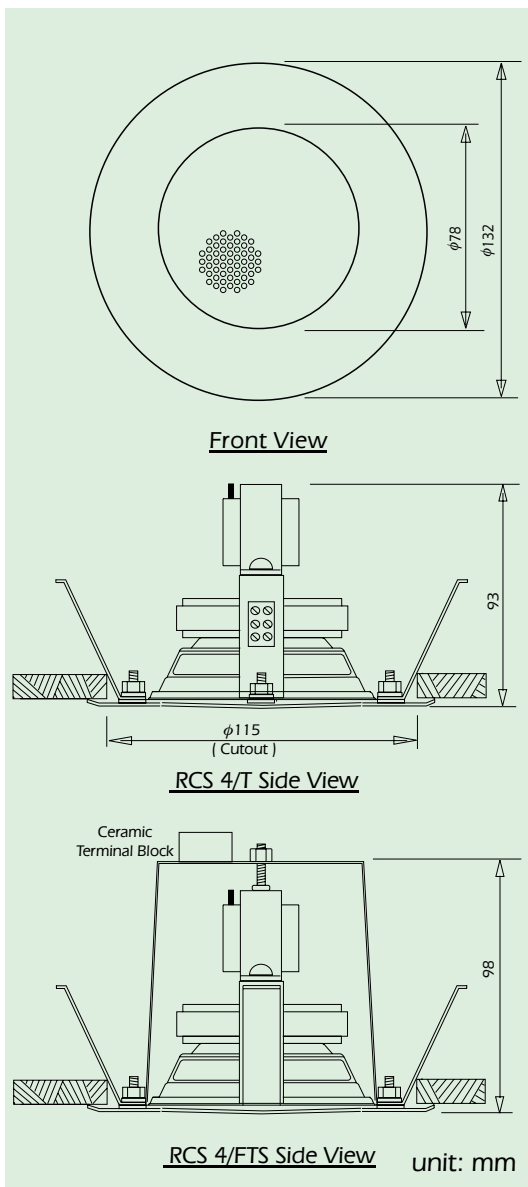

EASE and CATT data are available on request

