

# SENTRY 6/ST METAL CABINET SPEAKER, VANDALPROOF


## Technical Specifications

|                                          |                               |
|------------------------------------------|-------------------------------|
| Rated power, Watts                       | 6                             |
| Transformer tapings 100 volt line, Watts | 6 / 3 / 1.5 / 0.75            |
| Transformer Impedance , Ohms             | 1.67K / 3.33K / 6.66K / 13.3K |
| 70.7 volt line, Watts                    | 3 / 1.5 / 0.75 / 0.375        |
| Driver impedance, Ohms                   | 8                             |
| Effective frequency range, Hz            | 120 - 20,000                  |
| S.P.L. ,@ 1m, 1watt, dB                  | 93                            |
| S.P.L. ,@Full power/ 1m, dB              | 101                           |
| Dispersion at 1,000 Hz, Degrees          | 140                           |
| Directivity Q factor, 1k Hz              | 2.9                           |
| Dimensions front and depth, mm           | 190 x 190 x 75                |
| Net weight, Kgs                          | 1.8                           |
| Colour / Finish                          | White, RAL9010                |
| Material                                 | Steel                         |
| Mounting                                 | Screw                         |




Flush Mounted Version Available model **SENTRY 6/TBB**


SENTRY 6/ST

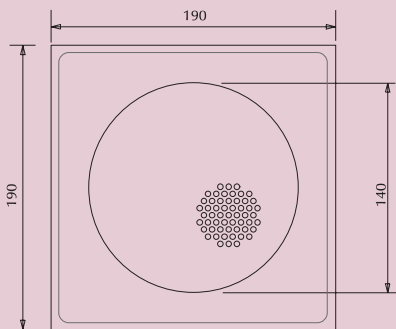


Front View

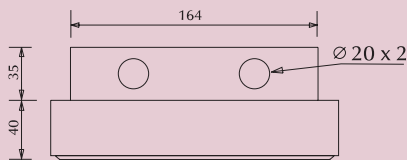

Top View

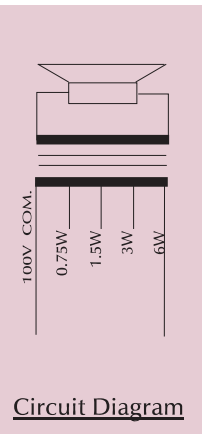


Circuit Diagram

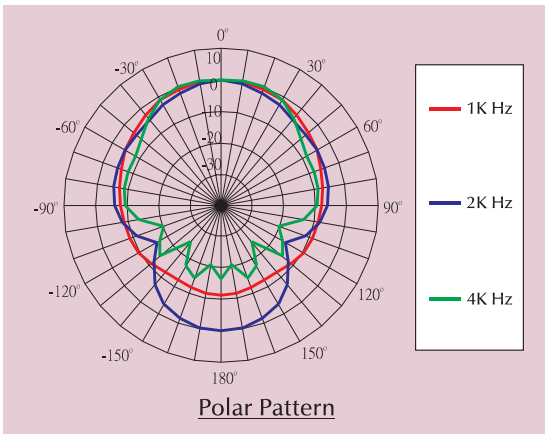

Polar Pattern

SENTRY 6/TBB

BACK BOX  
170 x 170 x 70

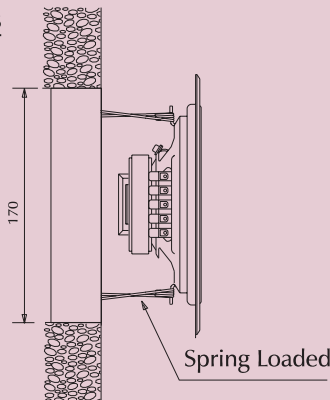

In Wall Version

unit: mm

