


ACCESSORIES



TU4 - 4 channels galvanic insulation unit

4 channel galvanic insulation unit for Q3002 and D1502 amplifiers.

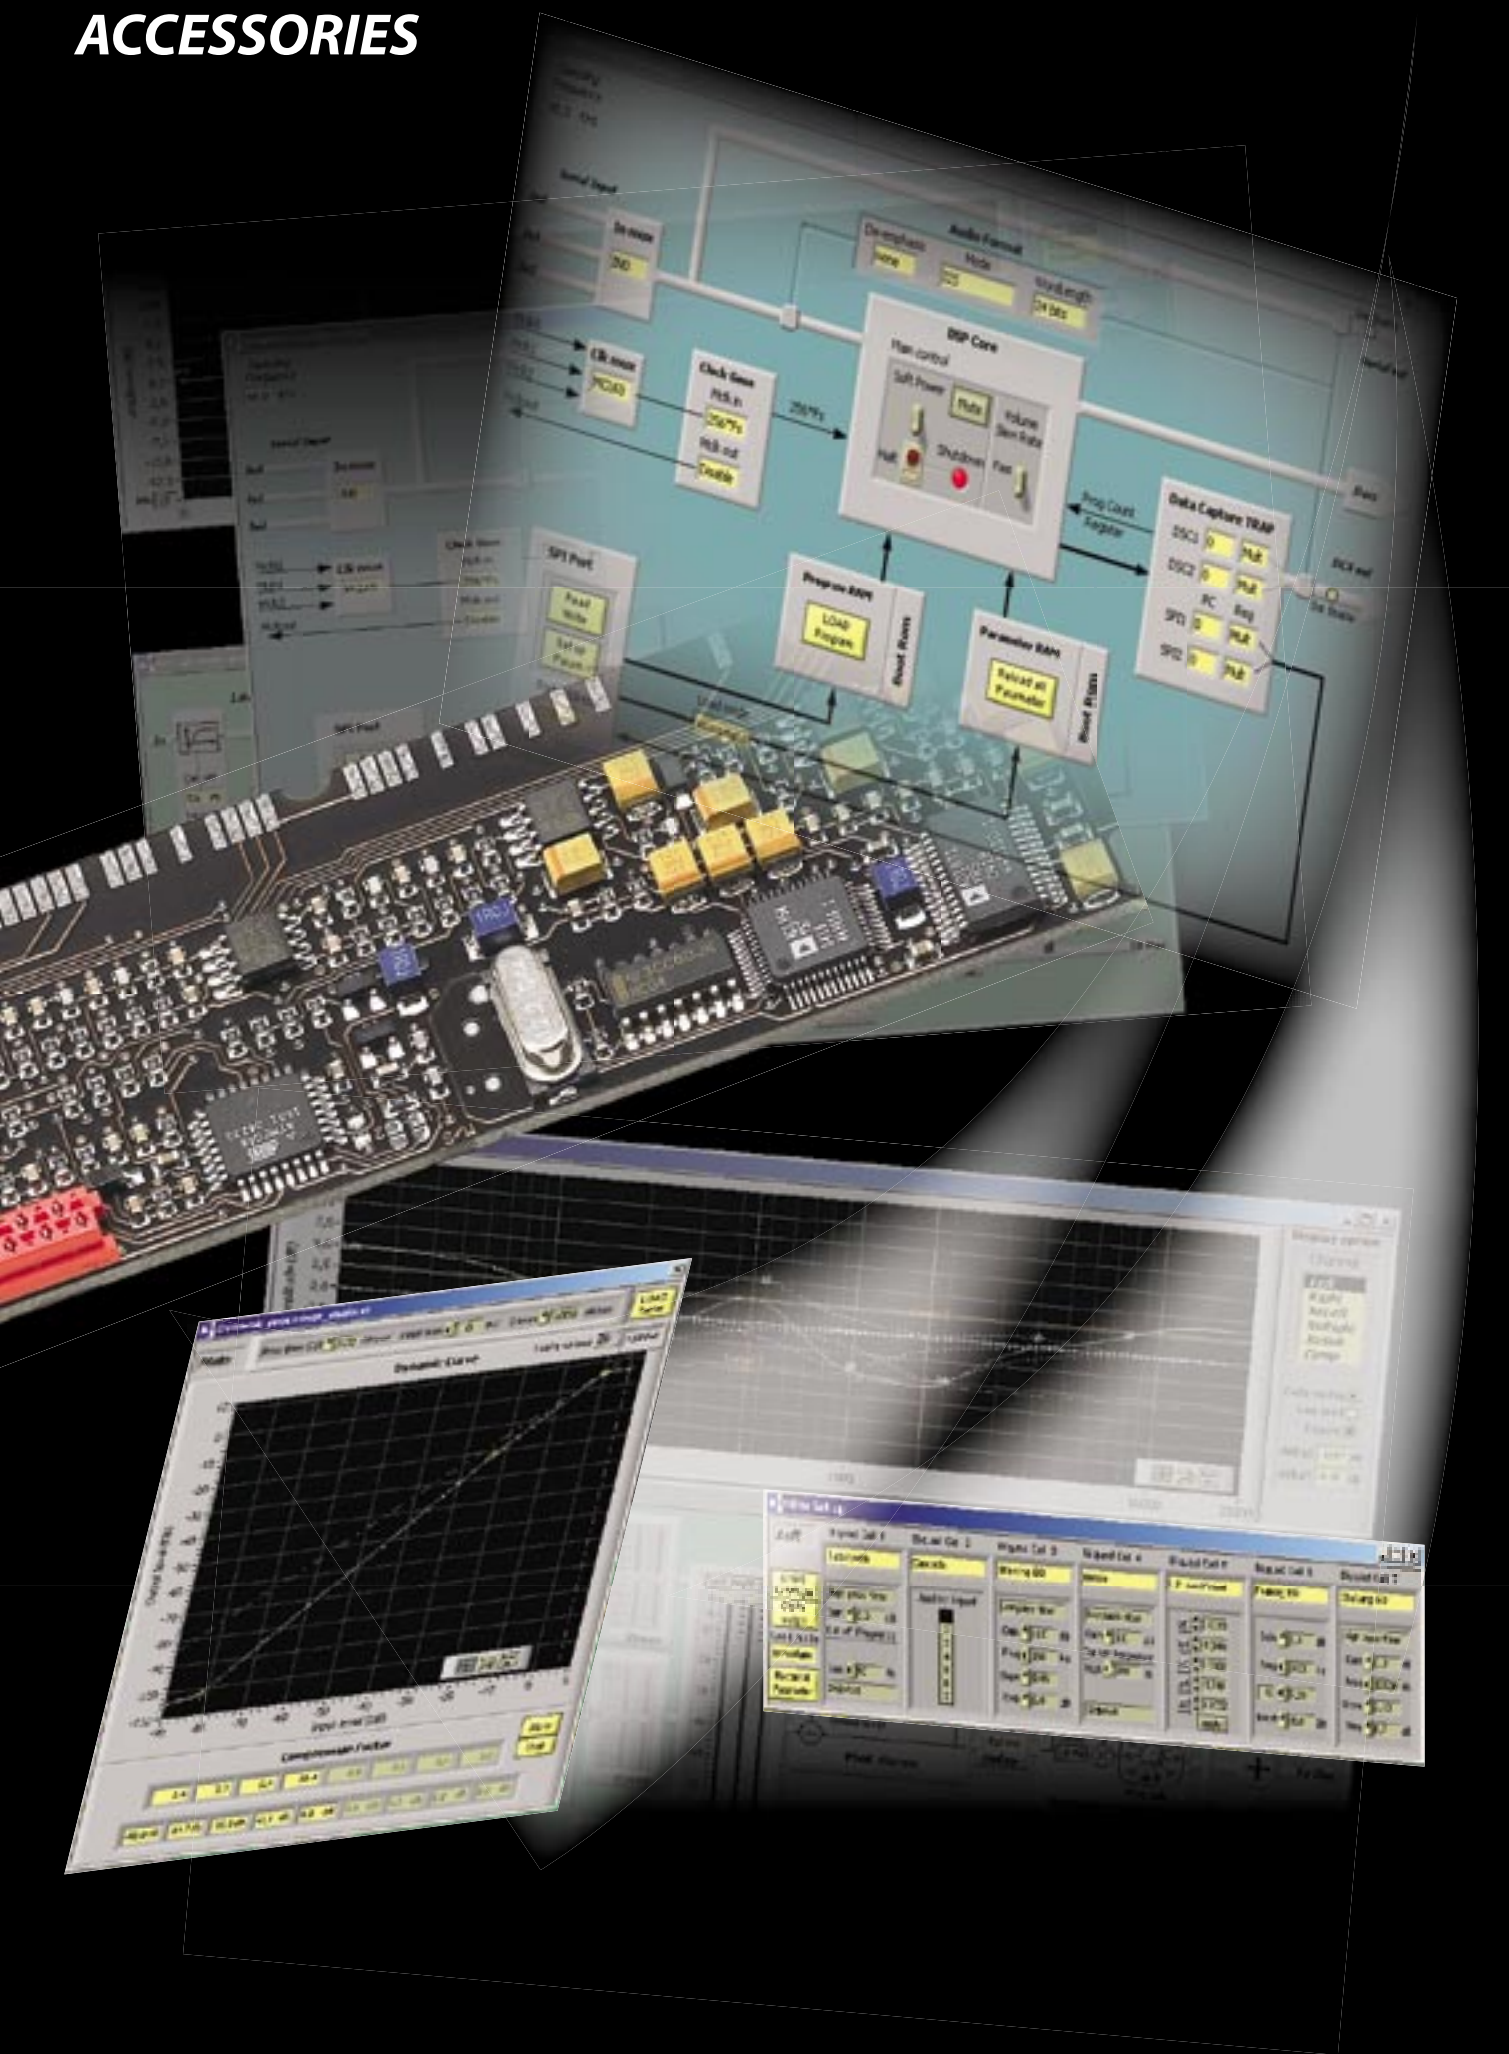

CHANNELS	4
OUTPUT FOR EACH CHANNEL	350 W (50, 70, 100V output)
POWER BANDWIDTH	50 Hz- 20kHz
DIMENSIONS	Standard rack 19" - 1 unit (HxWxD) 44x482x370 mm
WEIGHT	18 kg

Public address applications can be made thru QTU1400 fully embedded solution or with standard Q3002 and D1502 models with the addition of TU4 galvanic insulation unit.

Power Control Hub

RS 485 serial data port splitter with built in backup power supply for each connected device. Up to 16 amplifiers can be connected for cost effective networking solution.



Power Control Module

Microprocessor based board to be installed it the Q, D, QTU, series together with the rear panel data port board. The unit provides cost effective, install friendly solution for remote controlling and monitoring.

